

MATERIAL △_F

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Brass

ORDER INFORMATION

5EH2RDDNN - XX XX

No. of contacts
(10,12,14,16,20,26,30,
34,40,44,50)

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	


△_D X X U - 0 0

3:W/O peg & short ejector
1:W/O peg & Long ejector


RoHS

T:Tube, W/O Cap


AMTEK 糧德
2023.11.15
Released DCC

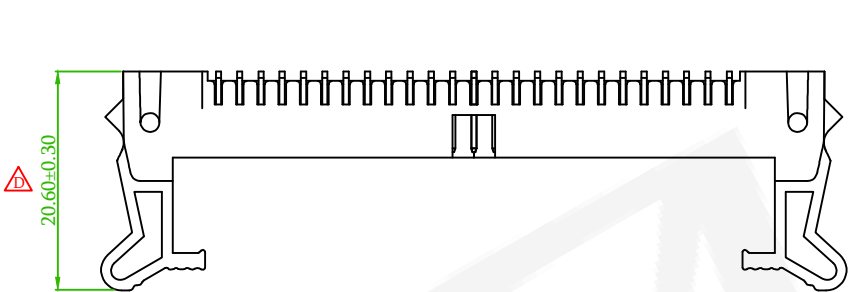


△ Long Ear



Recommended PCB Layout
(PCB TOLERANCE ±0.05)

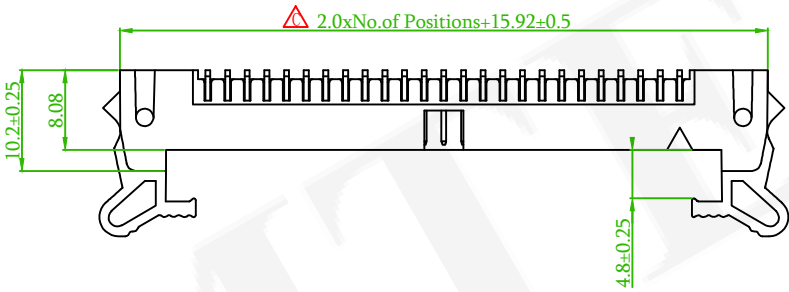

Short Ear



Old Part No.:EDH2R-XX-1-U

△ _F	ECN NO.:230937 Revise the drawing	Alice	2023/10/23
△ _E	ECN NO.:230822 Revise the Drawing	Randy	2023/09/11
△ _{x5}	Add the Long ear specifications	Alice	2022/05/31
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	EJECTOR HEADER 2.0mm				頁數 Page	1/1
品號 PART NO.	△ _D 5EH2RDDNN-XXXXXXU-00				繪圖 DRAWN	Jeff 2016/04/26
圖號 DRAWING NO.	GN110-JF177	版本 REV.	F	核對 CHECKED	John 2016/04/26	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/04/26	
公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	