

MATERIAL

Insulator: Nylon 9T,UL 94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5EH3MSDNN-XXXXXXU-00

3:Pitch 1.27mm

No. of contacts

G0:Gold Flash

GA:5u"

GB:10u"

GC:20u"

GD:30u"

T0:Tin Plated

TE:Tin 200u"

S0:Selective Au

SA:5u"

SB:10u"

SC:20u"

SD:30u"

3:W/O peg & short ejector



T:Tube W/O Cap

H:T/R W/O Cap



R:T/R With Cap

RoHS

AMTEK 耀德
2023.11.15
Released DCC

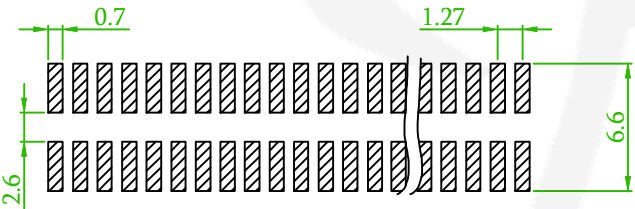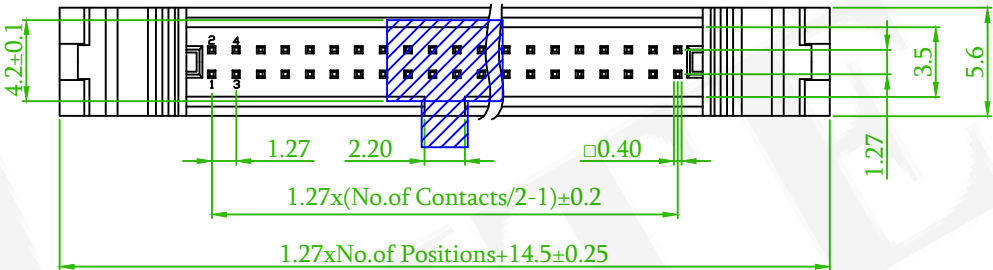

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

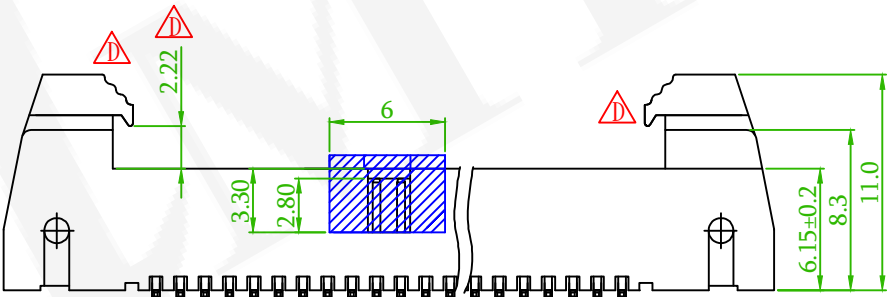

Old Part No. : EDH3M-XX-U

	ECN NO:230937 Revise the Drawing	Alice	2023/10/23
	ECN NO:220615 Revise the Drawing	Alice	2022/07/01
	Revised the Drawing & Add the package:R:T/R With Cap	Eloise	2017/03/28
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	EJECTOR HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5EH3MSDNN-XXXXXXU-00 				繪圖 DRAWN	Roy 2016/07/12
圖號 DRAWING NO.	GN016-JF191	版本 REV.	E	核對 CHECKED	Erina 2016/07/12	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/07/12	
公差 TOLERANCE	.X ± 0.20 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		