

MATERIAL

Insulator: Nylon 9T,UL 94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5EH3RDANN-XXXX-X-B-U-00

No. of contacts
(10, 14, 16, 20, 26,
30, 34, 40, 50, 60,
64, 80, 100)

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

3:W/O peg & short ejector

B



T:Tube

RoHS

AMTEK 耀德

2023.11.15

Released DCC

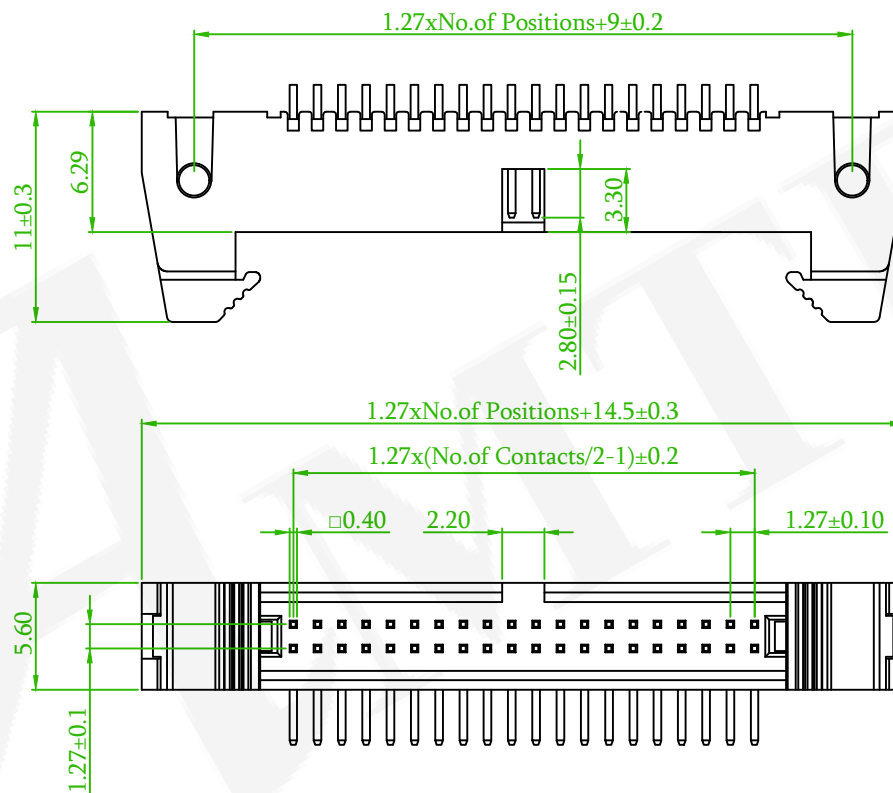

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No.:EDH3R-XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	EJECTOR HEADER 1.27mm				頁數 Page	1/1
	品號 PART NO.	 B5EH3RDANN-XXXXXXU-00				繪圖 DRAWN	Jeff 2015/08/31
	圖號 DRAWING NO.	GN003-JS027	版本 REV.	C	核對 CHECKED	John 2015/08/31	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/31	
	公差 TOLERANCE	.X ±0.25 .XX ±0.20	.X° ±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO.:230937 Revise the Packing	Alice	2023/10/23
	ECN NO.:200807 Revise the Packing	Alice	2020/08/31