

MATERIAL

Insulator:PA9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5EH4SDANN - XX XX X X X X X U - 0 0

©:Standard Recommend

No. of contacts
(10,12,14,16,20,24,26,30,
32,34,40,44,50,60,64,
,80,100)




G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

3:W/O peg & short ejector

A:Tray W/O Cap
T:Tube W/O Cap


RoHS

AMTEK 糧德
2023.11.15
Released DCC

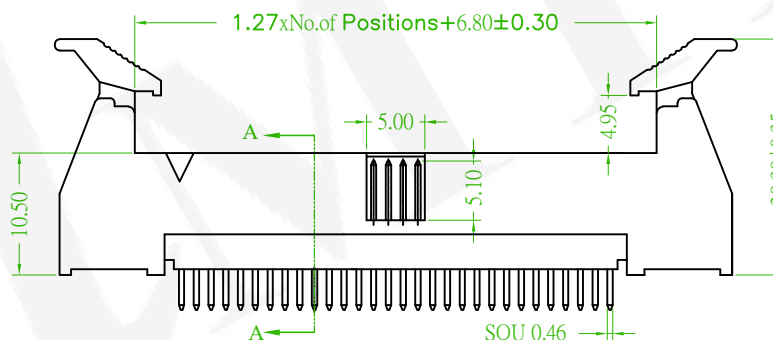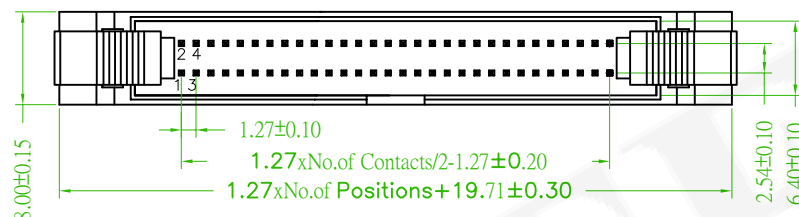

Section "A-A"

Old Part No.:EDH4S-XXXB-U

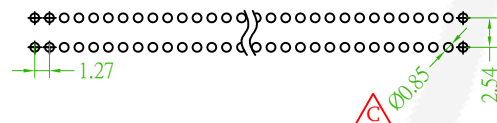

Recommended PCB Layout
(PCB TOLERANCE ±0.05)



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	EJECTOR HEADER 1.27x2.54mm				頁數 Page	1/1
品號 PART NO.	 5EH4SDANN-XXXXXXU-00				繪圖 DRAWN	Jeff 2015/08/31
圖號 DRAWING NO.	GN003-JS030	版本 REV.	C	核對 CHECKED	John 2015/08/31	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/31	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO.:230937 Revise the drawing	Benson	2023/10/18
 x2	Add: T: Tube W/O Cap	David	2021/12/22