



SPECIFICATION

Current Rating :2A DC , 1A AC
Voltage Rating :12V DC,100V AC
Insulation Resistance:100M Ω Min.
Contact Resistance:30m Ω Max.
Dielectric Voltage:500V AC for one minute
Durability:2000 Cycles Min.
Insertion Force: 0.3~3.0 Kg.
Extraction Force: 0.3~3.0Kg.







ORDER INFORMATION

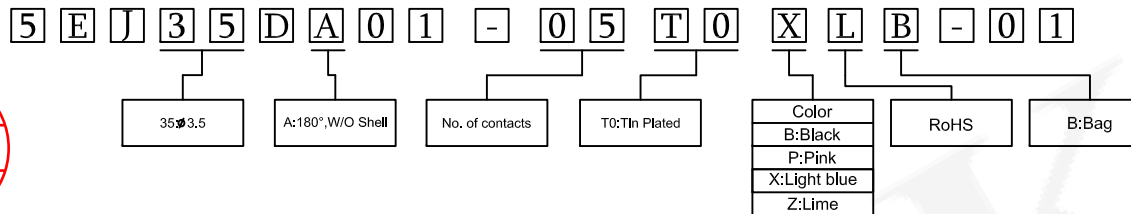

PCB LAYOUT
(BOTTOM VIEW)

NO.	NAME	MATERIAL	FINISH	QTY
1	EARTH TERMINAL	PHOS. BRONZE t=0.25	TIN PLATED	1
2	TIP SPRING	PBS t=0.25	TIN PLATED	1
3	RING SHUNT	BRASS t=0.3	TIN PLATED	1
4	RING SHUNT	BRASS t=0.3	TIN PLATED	1
5	TIP SPRING	PBS t=0.25	TIN PLATED	1
6	HOUSING	PBT G.F.	SEE TABLE	1

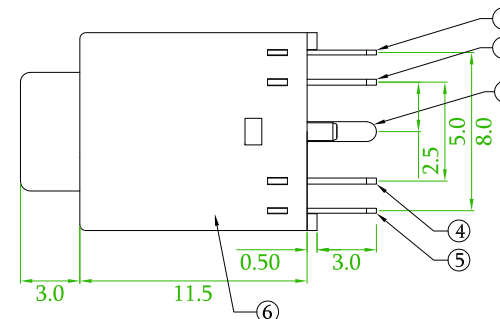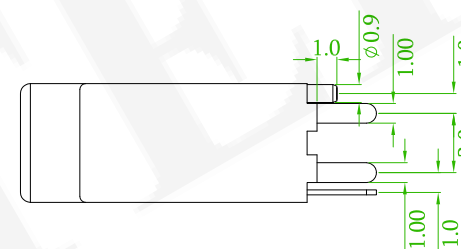

Old P/N:EPJ35-0015P-XXX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	Earphone Jack				頁數 Page	1/1
	品號 PART NO.	5EJ35DA01-05T0XLB-01				繪圖 DRAWN	Roy 2017/02/07
	圖號 DRAWING NO.	GW216-RL414		版本 REV.	A	核對 CHECKED	Jonny 2017/02/07
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2017/02/07
	公差 TOLERANCE	.X $\pm$ 0.25 .XX $\pm$ 0.13	X° $\pm$ 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	