



SPECIFICATION

Current Rating :2A DC , 1A AC
Voltage Rating :12V DC,100V AC
Insulation Resistance:100M Ω Min.
Contact Resistance:30m Ω Max.
Dielectric Voltage:500V AC for one minute
Durability:1500 Cycles Min.
Insertion Force: 0.3~3.0 Kg.
Extraction Force: 0.3~3.0Kg.


ORDER INFORMATION

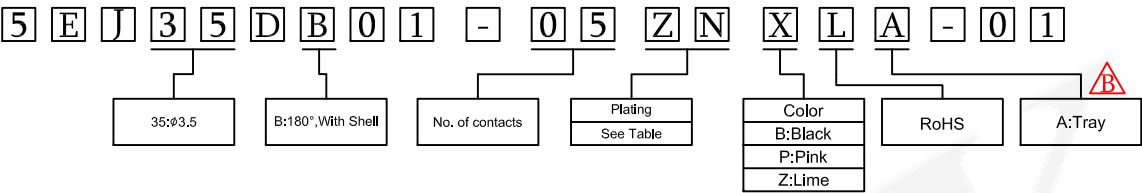


AMTEK 糧德
2019.11.21
Released DCC

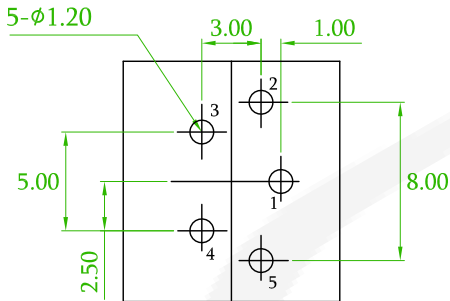

PCB LAYOUT
(TOP VIEW)



NO	NAME	MATERIAL	FINISH	Q'TY	
1	PIN1	PHOS. BRONZE T:0.25	TIN PLATED	1	
2	PIN2	PHOS. BRONZE T:0.25	TIN PLATED	1	
3	PIN3	PBS T:0.25	SILVER PLATED	1	
4	PIN4	PBS T:0.25	SILVER PLATED	1	
5	PIN5	PHOS. BRONZE T:0.25	TIN PLATED	1	
6	HOUSING	PA66(ASV0)	SEE TABLE	1	
7	SHELL	STAINLESS T:0.15		1	
8	COVER	PBT G.F.	LIME	1	

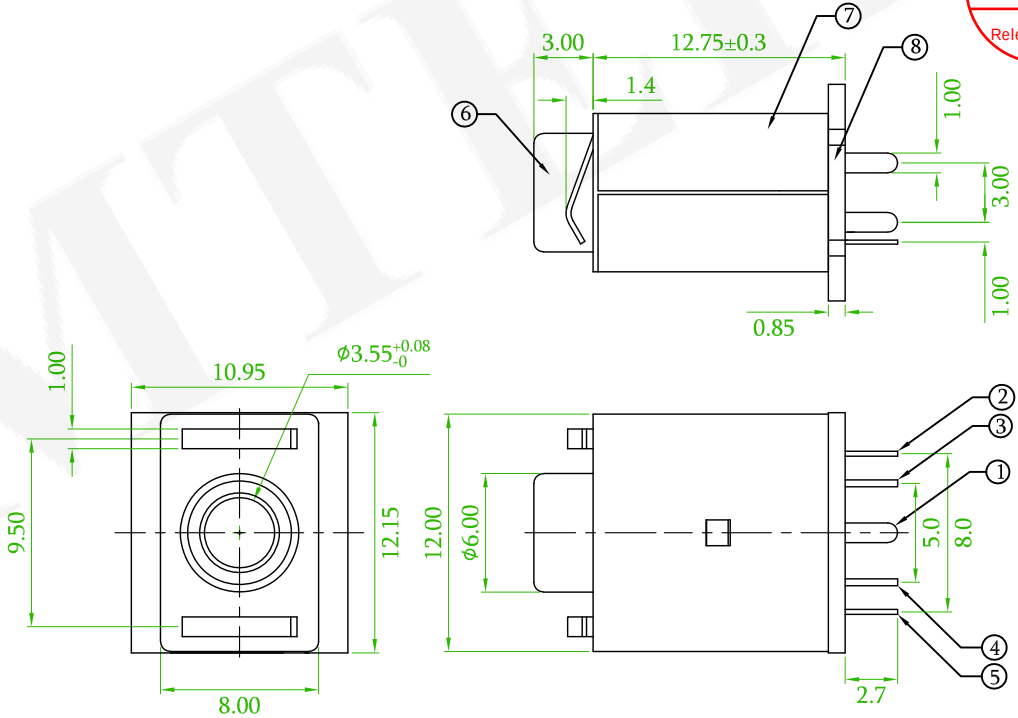

Old P/N:EPJ35-2506SP-05TX-L

REV.	QEC NO.: 191109 Revise the package	Benson	2019/11/20
	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	Earphone Jack				頁數 Page	1/1
	品號 PART NO.	5EJ35DB01-05ZNXLA-01				繪圖 DRAWN	Roy 2017/02/07
	圖號 DRAWING NO.	GW216-RL416				核對 CHECKED	Jonny 2017/02/07
	客戶品號 CUSTOMER P/N					承認 APPROVED	Aaron 2017/02/07
	公差 TOLERANCE	.X±0.25 .XX±0.13	X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	