

SPECIFICATIONS

Current Rating: 2 AMP, DC 12V

1 AMP, AC 100V

Insulation Resistance: 100MΩ Min.

Contact Resistance: 30mΩ Max.

Dielectric Voltage: 500V AC for one minute

Operation Temperature: -25°C to +70°C

MATERIAL

Insulator: Thermoplastic

Contact Pin: Copper Alloy

ORDER INFORMATION

5 E J 3 5 D C 0 2 - 0 3 T 0 X L A - 0 1

C: R/A
W/O Shell

T0: Tin Plated

B: Black
U: Blue




RoHS

A: Tray




AMTEK 耀德
2020.07.24
Released DCC

5	BACK COVER	1	PBT G.F.	
4	HOUSING	1	PBT G.F.	
3	TIP SPRING	1	Copper Alloy 0.30	TIN PLATED
2	RING SPRING	1	Copper Alloy 0.30	TIN PLATED
1	GROUND TERM.	1	Copper Alloy 0.50	TIN PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

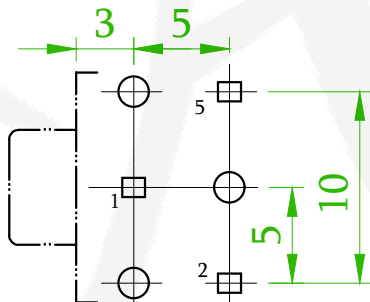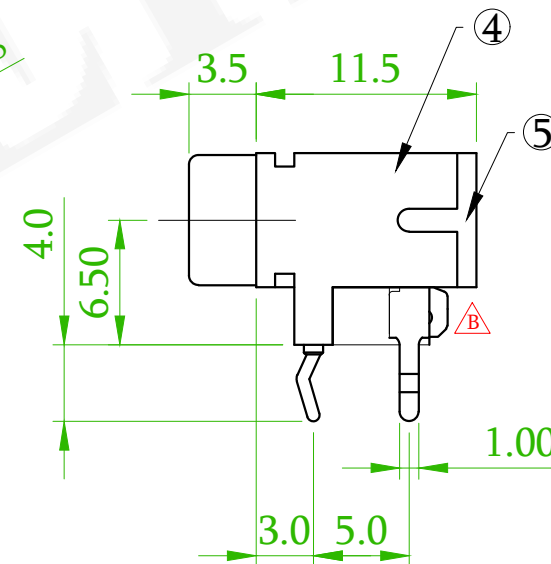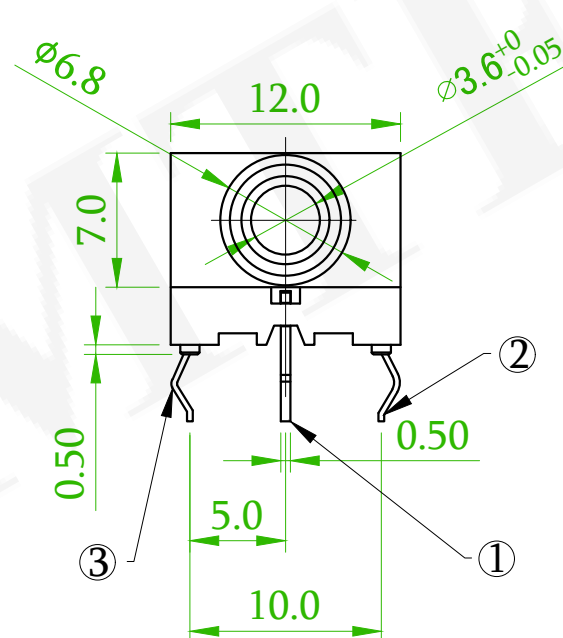

Recommended PCB Layout
(PCB TOLERANCE ±0.1)



 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	EARPHONE JACK 3.5mm R/A DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5EJ35DC02-03T0XLA-01				繪圖 DRAWN	Gary 2018/01/18
圖號 DRAWING NO.	客戶品號 CUSTOMER P/N	GW216-GA910	版本 REV.	B	核對 CHECKED	Josh 2018/01/18	
	公差 TOLERANCE	.X ±0.25 .XX ±0.13	比例 SCALE	1:1	承認 APPROVED	Jason 2018/01/18	
單位 UNIT	mm		第三 THIRD ANGLE PROJECTION				

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
B x1	ECN-200705: Revise the drawing	Alice	2020/07/20