

SPECIFICATION

Current Rating :2A DC , 1A AC
Voltage Rating :12V DC,100V AC
Insulation Resistance:100M ΩMin.
Contact Resistance:30m ΩMax.
Dielectric Voltage:500V AC for one minute
Durability:1500 Cycles Min.
Insertion Force: 0.3~3.0 Kg.
Extraction Force: 0.3~3.0Kg.

ORDER INFORMATION

5EJ35DD02-05T0XLA-01

35±0.35

D:90° With Shell

No. of contacts

T0: Tin Plated

Ring Color



P: Pink

X: Light blue



Z: Lime

RoHS

A: Tray

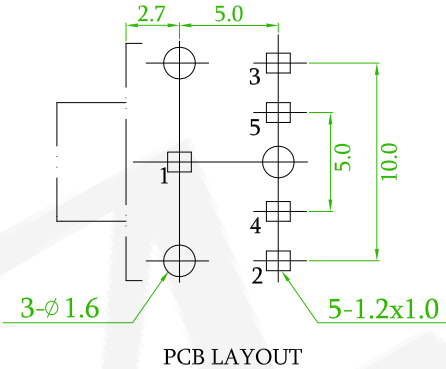

NO.	NAME	MATERIAL	FINISH	Q'TY
1	GROUND TERM.	C.R.S. T:0.5	TIN PLATED	1
2	RING SPRING	PBS T:0.3	TIN PLATED	1
3	TIP SPRING	PBS T:0.3	TIN PLATED	1
4	RING BREAK	BRASS T:0.4	TIN PLATED	1
5	TIP BREAK	BRASS T:0.4	TIN PLATED	1
6	BUSHING	BRASS	NICKEL PLATED	1
7	HOUSING	PBT G.F.	BLACK	1
8	BACK COVER	PBT G.F.	BLACK	1
9	SPRING WIRE	BRASS	SILVER PLATED	1
10	TUBE	PBT G.F.	SEE TABLE	1

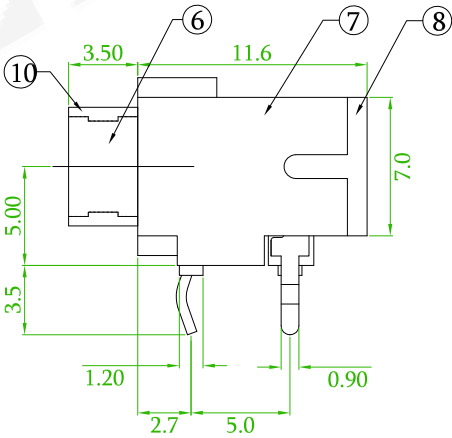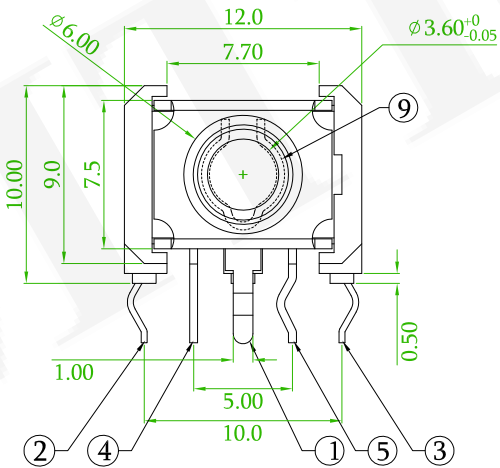

Old P/N:EPJ35-0005FP-XXTX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	Earphone Jack				頁數 Page	1/1
	品號 PART NO.	5EJ35DD02-05T0XLA-01				繪圖 DRAWN	Roy 2017/01/26
	圖號 DRAWING NO.	GW216-RL401	版本 REV.	A	核對 CHECKED	Jonny 2017/01/26	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2017/01/26	
	公差 TOLERANCE	.X±0.25 .XX±0.13	X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	