

SPECIFICATION

Current Rating :2A DC , 1A AC
Voltage Rating :12V DC,100V AC
Insulation Resistance:100M Ω Min.
Contact Resistance:30m Ω Max.
Dielectric Voltage:500V AC for one minute
Durability:1500 Cycles Min.
Insertion Force: 0.3~3.0 Kg.
Extraction Force: 0.3~3.0Kg.

ORDER INFORMATION

5 E J 3 5 D D 0 3 - 0 3 T 0 B L B - 0 1



35 $\pm$ 3.5

D:90° With Shell


No. of contacts

T0: Tin Plated




Color
B: Black

RoHS

B: Bag

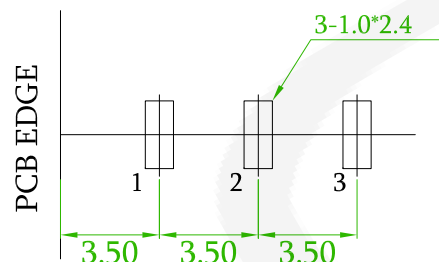

PCB LAYOUT
(BOTTOM VIEW)

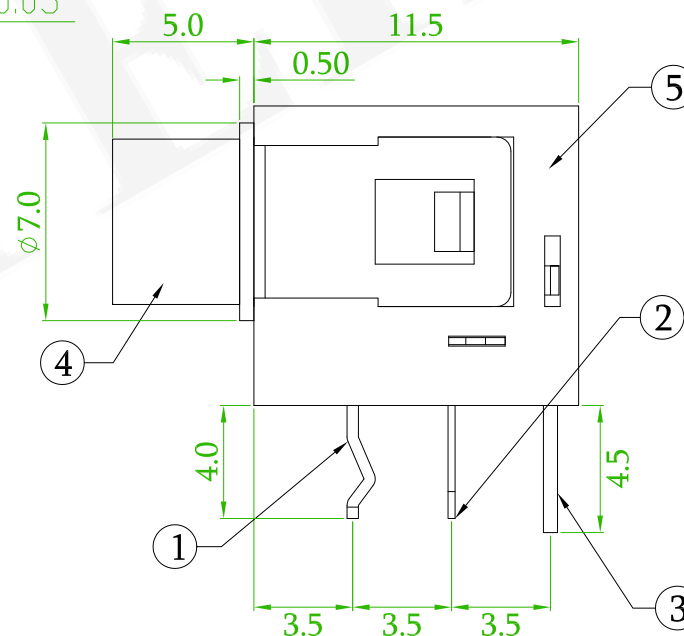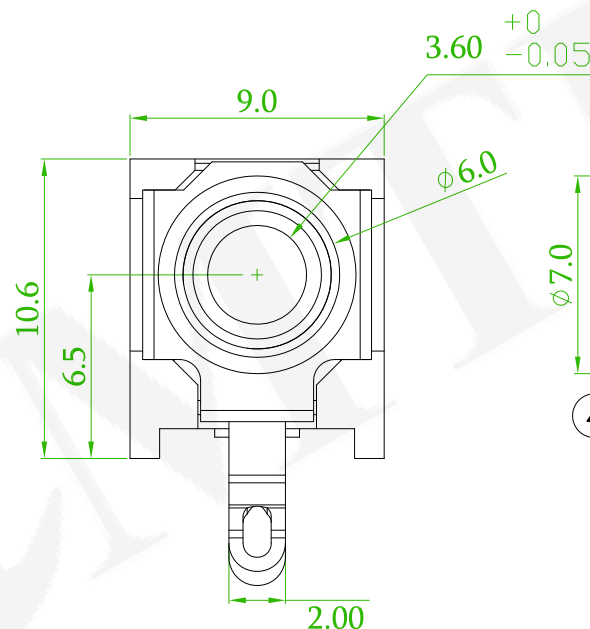

NO.	NAME	MATERIAL	FINISH	Q'TY
1	GROUND TERM.	C.R.S. 0.4THK	TIN PLATED	1
2	TIP TERM.	PHOS. BRONZE 0.25THK	TIN PLATED	1
3	RING TERM.	BRASS 0.5THK	TIN PLATED	1
4	BUSHING	BRASS	NICKEL PLATED	1
5	HOUSING	PBT G.F.	BLACK	1

Old P/N:EPJ35-2017A-03B-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	Earphone Jack				頁數 Page	1/1
	品號 PART NO.	5EJ35DD03-03T0BLB-01				繪圖 DRAWN	Roy 2017/02/07
	圖號 DRAWING NO.	GW216-RL415		版本 REV.	A	核對 CHECKED	Jonny 2017/02/07
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2017/02/07
	公差 TOLERANCE	.X $\pm$ 0.25 .XX $\pm$ 0.13	X° $\pm$ 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	