
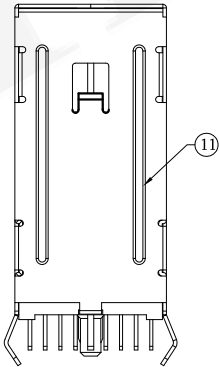
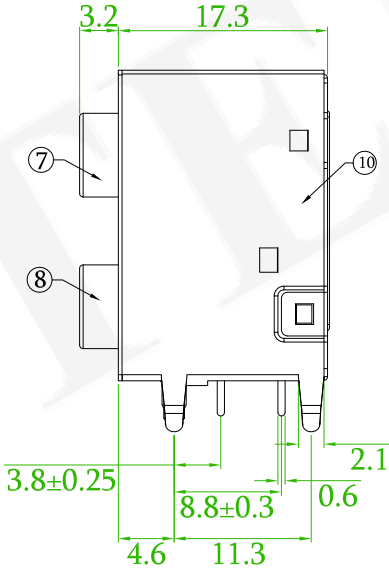
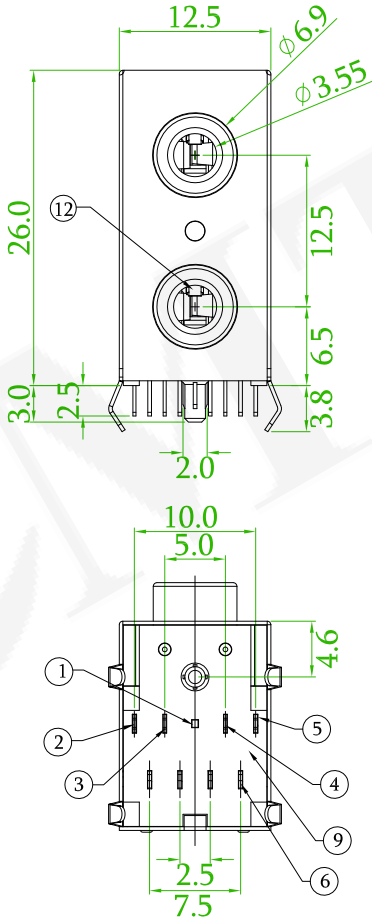

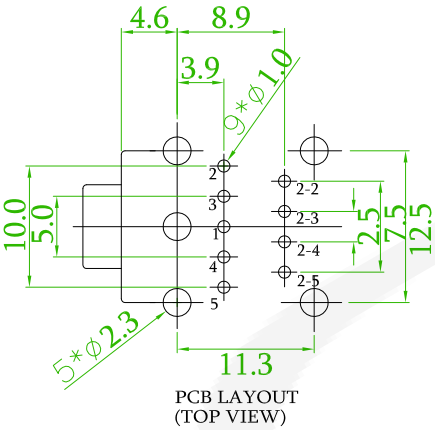


SPECIFICATION

Current Rating :2A DC , 1A AC
Voltage Rating :12V DC,100V AC
Insulation Resistance:100M ΩMin.
Contact Resistance:30m ΩMax.
Dielectric Voltage:500V AC for one minute
Durability:1500 Cycles Min.
Insertion Force: 0.3~3.0 Kg.
Extraction Force: 0.3~3.0Kg.

ORDER INFORMATION

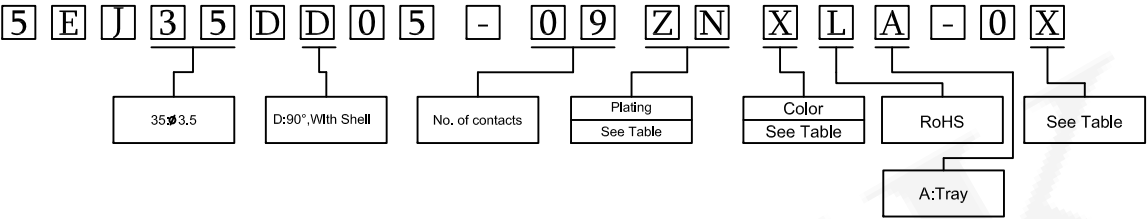

NO.	NAME	MATERIAL	FINISH	Q'TY
1	GROUND TERM.	PHOS.BRONZE 0.50	TIN PLATED	1
2	SPRING TERMINAL	PHOS.BRONZE 0.25	TIN PLATED	2
3	SPRING TERMINAL	PHOS.BRONZE 0.25	SILVER PLATED	2
4	SPRING TERMINAL	PHOS.BRONZE 0.25	SILVER PLATED	2
5	SPRING TERMINAL	PHOS.BRONZE 0.30	TIN PLATED	2
6	TERMINAL	BRASS 0.3mm	TIN PLATED	4
7	TOP HOUSING	NYLON PA66(ASV0)	SEE COLOR	1
8	BOTTOM HOUSING	NYLON PA66(ASV0)	SEE COLOR	1
9	BOTTOM COVER	PBT G.F.	BLACK	1
10	FRONT SHELL	SPCC 0.3mm	NICKEL PLATED	1
11	BACK SHELL	BRASS 0.3mm	NICKEL PLATED	1
12	GROUND TERM.	PHOS.BRONZE 0.25	TIN PLATED	2



P/N	5EJ35DD05-09ZNBLA-01	5EJ35DD05-09ZNZLA-01	5EJ35DD05-09ZNZLA-02	5EJ35DD05-09ZNZLA-03
HOUSING TOP COLOR	BLACK	LIME	PINK	LIME
HOUSING BOTTOM COLOR		PINK	LIME	LIGHT BLUE

Old P/N:EPJ35-2511P-09TX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	Earphone Jack				頁數 Page	1/1
	品號 PART NO.	5EJ35DD05-09ZNXLA-0X				繪圖 DRAWN	Roy 2017/02/07
	圖號 DRAWING NO.	GW216-RL417				核對 CHECKED	Jonny 2017/02/07
	客戶品號 CUSTOMER P/N					承認 APPROVED	Aaron 2017/02/07
	公差 TOLERANCE	.X±0.25 .XX±0.13	X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	