

SPECIFICATION

Current Rating: 3 AMP

Insulation Resistance: 1000 MΩ Min.

Contact Resistance: 20m Ω Max.

Dielectric Voltage: 500V AC for one minute

Operation Temperature: -40°C to +105 °C

MATERIAL

Insulator: PA9T+30%G.F, UL94V-0, Black

Contact Pin: Copper Alloy

NOTE

Above 20 Poles with "E" Profile

ORDER INFORMATION

5 E L 1 R D A N N - X X X X X X U - 0 0



No. of contacts
(06,08,10,14,16,20
26,30,32,34,40,50,
60,64)

G0:Gold Flash S0:Selective
GB:10u" SB:10u"
GF:15u" SF:15u"
GD:30u" SD:30u"
T0:Tin Plated

1:W/O peg & long ejector
(D=14.55mm)
3:W/O peg & short ejector
(D=10.65mm)

A:Tray, W/O Cap
T:Tube, W/O Cap


RoHS





AMTEK 耀德

2021.04.28

Released DCC



Recommended PCB Layout
(PCB TOLERANCE ±0.1)

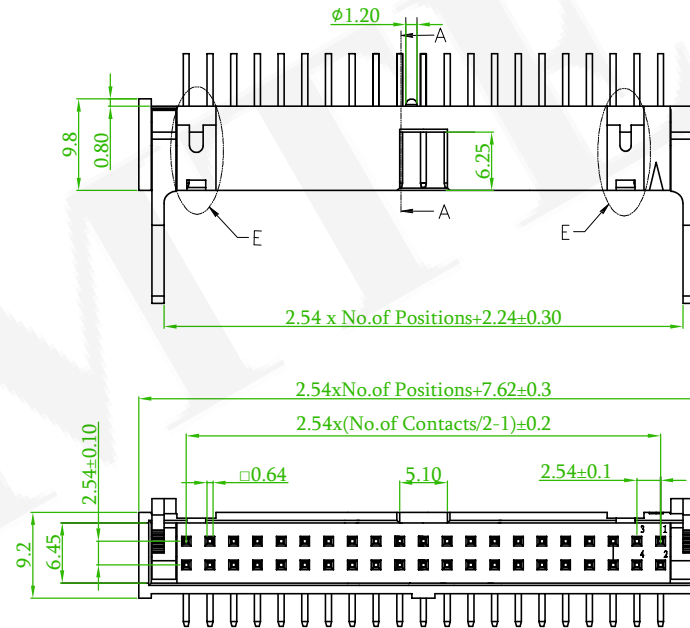

Section A-A

Old Part No.: EDH1RSL-XX-U



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	EJECTOR HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5EL1RDANN-XXXXXXU-00				繪圖 DRAWN	Mia 2016/08/19
圖號 DRAWING NO.	GN003-JS032	版本 REV.	B	核對 CHECKED	Jonny 2016/08/19	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/08/19	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	

△x1	Add the 32 Pin	Alice	2021/04/28
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE