

SPECIFICATION

Current Rating: 3 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute

Operation Temperature: -40°C to +105 °C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black

Contact Pin: Copper Alloy

NOTE

Above 20 Poles With "E" Profile 

ORDER INFORMATION

5EL1SDANN-XXXX-X-XU-00

No. of contacts
(06,08,10,14,16,20,
26,30,34,40,50,60
64)




G0: Gold Flash
GA: 5u"
GB: 10u"
GC: 20u"
GD: 30u"
T0: Tin Plated
TE: Tin 200u"

S0: Selective
SA: 5u"
SB: 10u"
SC: 20u"
SD: 30u"

1: W/O peg & long ejector
(D=14.55mm)
3: W/O peg & short ejector
(D=10.65mm)


A: Tray, W/O Cap
T: Tube, W/O Cap

RoHS

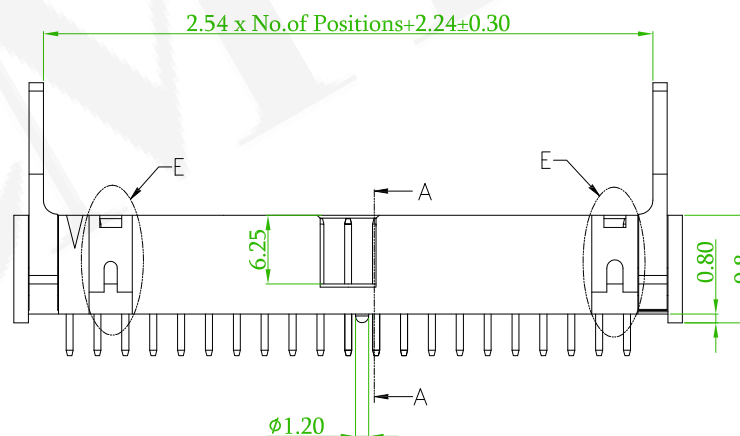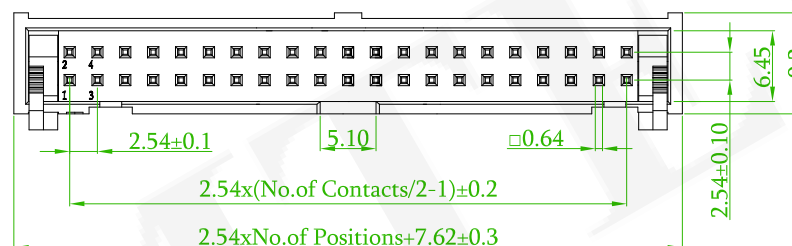

Section A-A

Old Part No.: EDH1SSL-XX-U

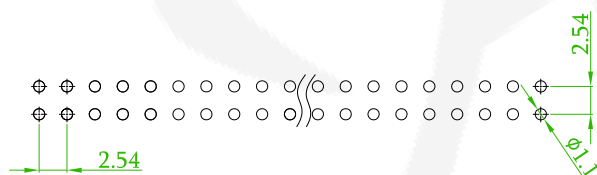

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

	Add the note.	Gary	2018/08/10
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	EJECTOR HEADER 2.54mm				頁數 Page	1/1
	品號 PART NO.	5EL1SDANN-XXXXXXU-00				繪圖 DRAWN	Jeff
	圖號 DRAWING NO.	GN003-GB337		版本 REV.	B	核對 CHECKED	Josh
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20		單位 UNIT	mm	THIRD ANGLE PROJECTION	
		.X° ± 3°					