


SPECIFICATION

Current Rating:0.5A
Voltage Rating:50V AC
Insulation Resistance:500M Ω Min.
Contact Resisitance:100m Ω Max.
Dielectric Voltage:250V for one minute.
Operation Temperature:-55°C to +85°C




MATERIAL

Insulator:LCP,UL 94V-0
Contact Pin:Phosphor Bronze

ORDER INFORMATION

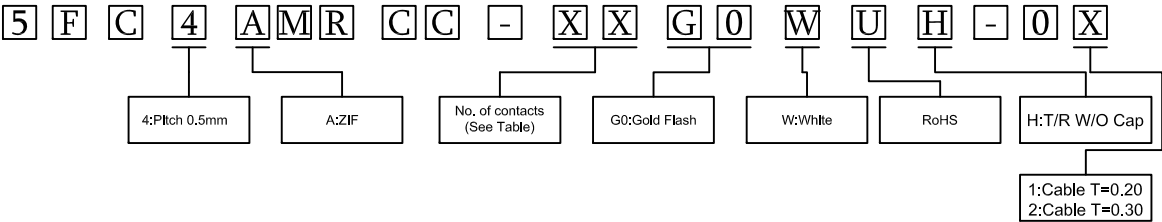

No. of Contact	Dim. A	Dim. B	Dim. C	Dim. D	Dim. H
4	4.00	1.50	2.57	3.38	0.90
6	5.00	2.50	3.57	4.38	
8	6.00	3.50	4.57	5.38	
10	7.00	4.50	5.57	6.38	
12	8.00	5.50	6.57	7.38	
13	8.50	6.00	7.07	7.88	
14	9.00	6.50	7.57	8.38	
15	9.50	7.00	8.07	8.88	
16	10.00	7.50	8.57	9.38	
20	12.00	9.50	10.57	11.38	
22	13.00	10.50	11.57	12.38	0.95
24	14.00	11.50	12.57	13.38	
25	14.50	12.00	13.07	13.88	
26	15.00	12.50	13.57	14.38	
30	17.00	14.50	15.57	16.38	
34	19.00	16.50	17.57	18.38	
40	22.00	19.50	20.57	21.38	
42	23.00	20.50	21.57	22.38	
50	27.00	24.50	25.57	26.38	

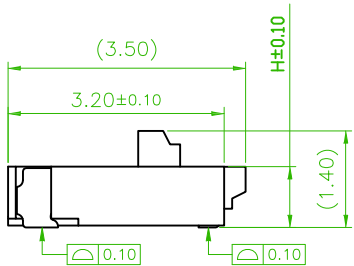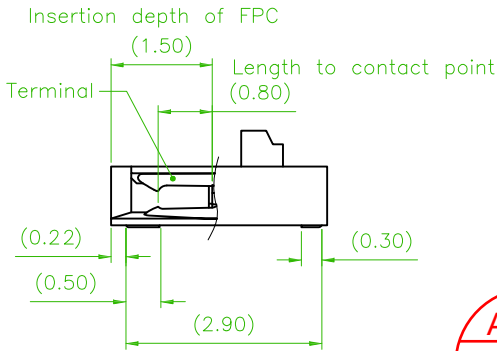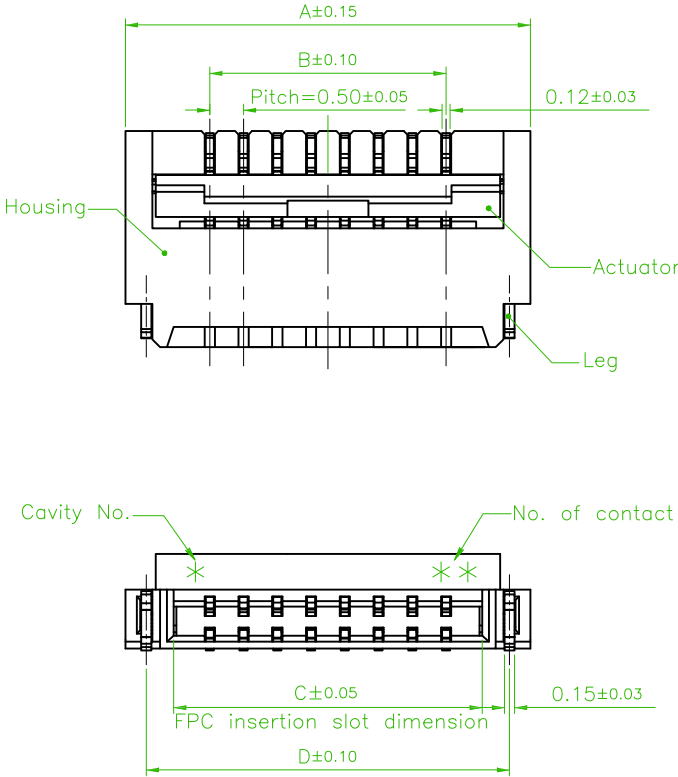



Old P/N:FPC4AMRB1-XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
------	------------------------	---------	------


Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FPC/FFC 0.5mm Zif R/A SMT Type				頁數 Page	1/2
品號 PART NO.	5FC4AMRCC-XXG0WUH-0X				繪圖 DRAWN	Roy 2016/08/25
圖號 DRAWING NO.		版本 REV.	B	核對 CHECKED		Jonny 2016/08/25
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED		Aaron 2016/08/25
公差 TOLERANCE	.X ± 0.15 .XX ± 0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION		

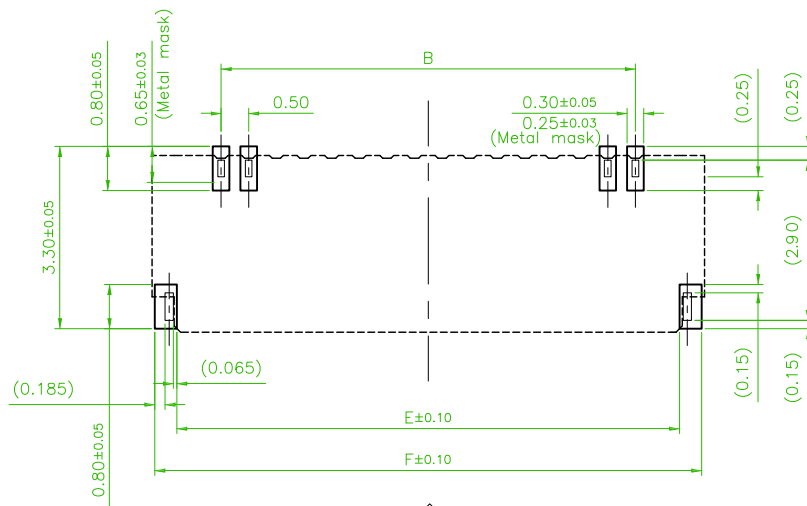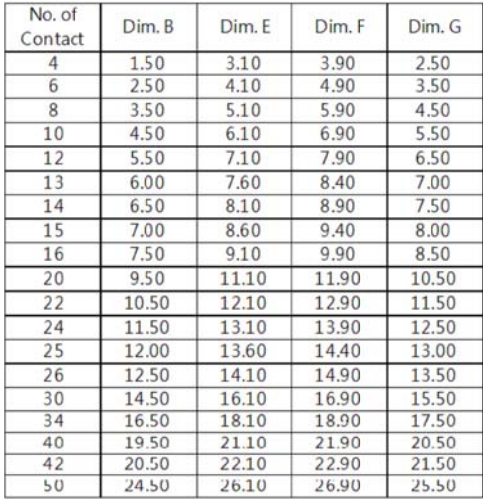

FPC/FFC INSERT DIRECTION
PCB Layout

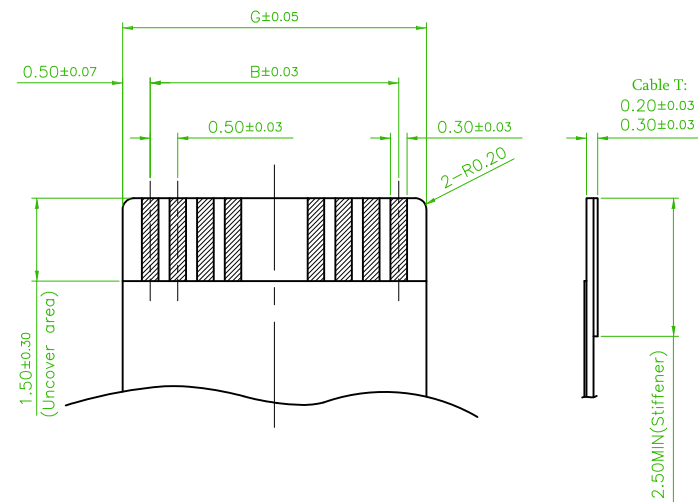

	Revise the Table	B	2016/10/04 Roy
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FPC/FFC 0.5mm Zif R/A SMT Type				頁數 Page	2/2
品號 PART NO.	5FC4AMRCC-XXG0WUH-0X			繪圖 DRAWN	Roy 2016/08/25	
圖號 DRAWING NO.		版本 REV.	B	核對 CHECKED	Jonny 2016/08/25	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/08/25	
公差 TOLERANCE	.X ± 0.15 .XX ± 0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION		