



SPECIFICATION

Current Rating:0.5 AMP
Insulation Resistance:50M Ω Min.
Contact Resisitance:40m Ω Max.
Dielectric Voltage:250V AC/Minute
Operation Temperature:-55 ° C to +85 ° C

MATERIAL


Insulator:High Temperature Thermoplastic,UL 94V-0
Contact Pin:Copper Alloy

ORDER INFORMATION

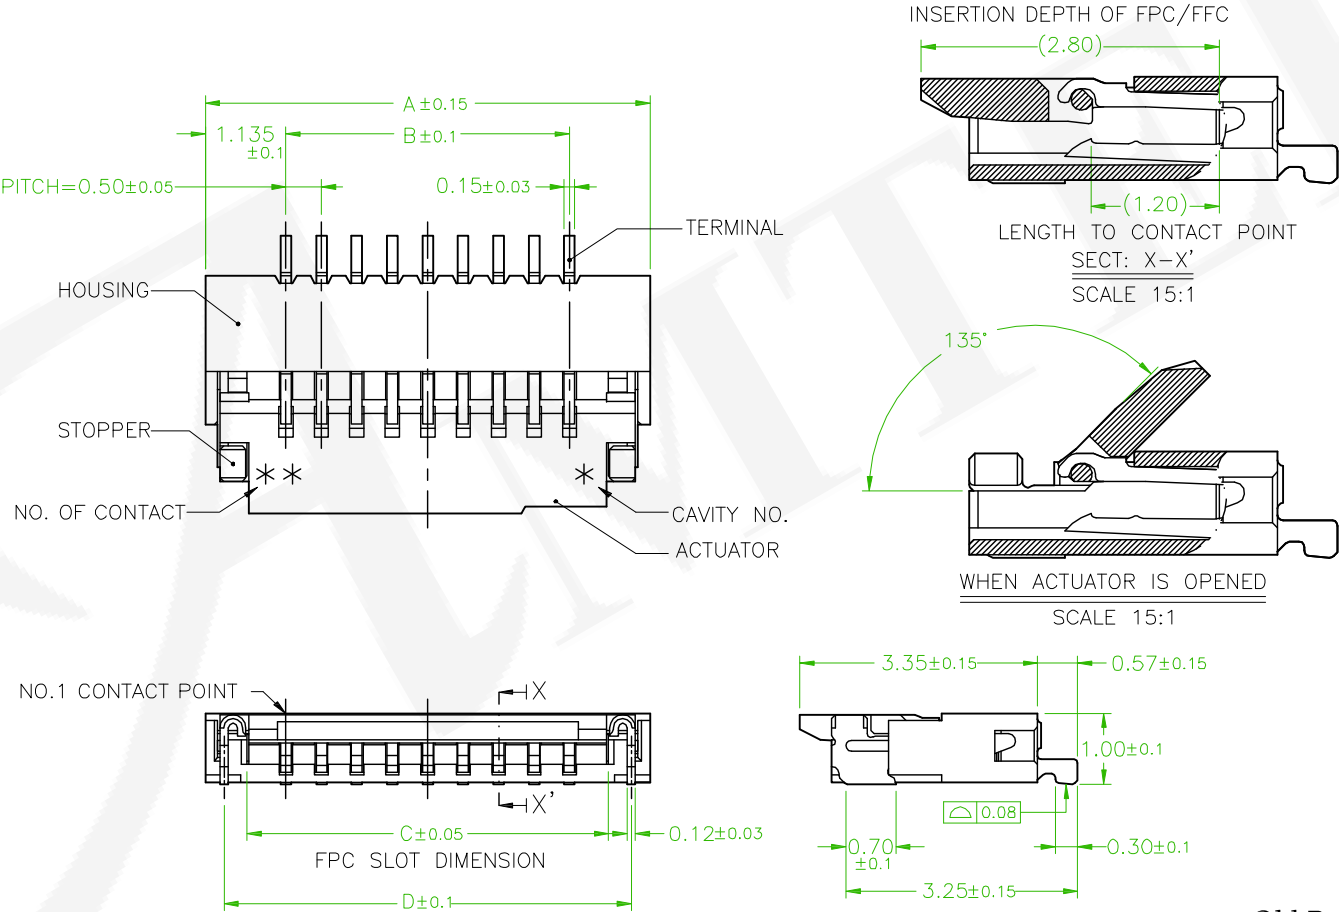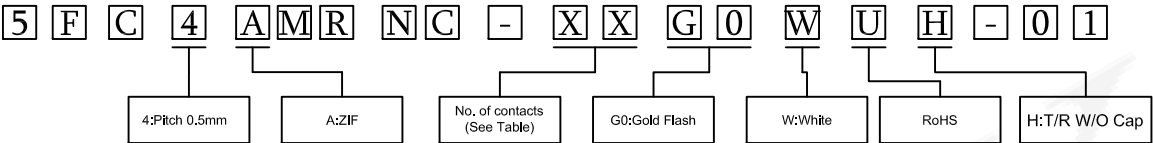


Old Part No. : FPC4AMR1B-XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE FPC/FFC 0.5mm Zif R/A SMT Type				頁數 Page	1/2
	品號 PART NO. 5FC4AMRNC-XXG0WUH-01				繪圖 DRAWN	Roy 2016/09/14
	圖號 DRAWING NO. GW030-EA127				核對 CHECKED	Jonny 2016/09/14
	客戶品號 CUSTOMER P/N				承認 APPROVED	Aaron 2016/09/14
	公差 TOLERANCE .X ± 0.20 .XX ± 0.15				單位 UNIT mm	THIRD ANGLE PROJECTION 
	DATE					

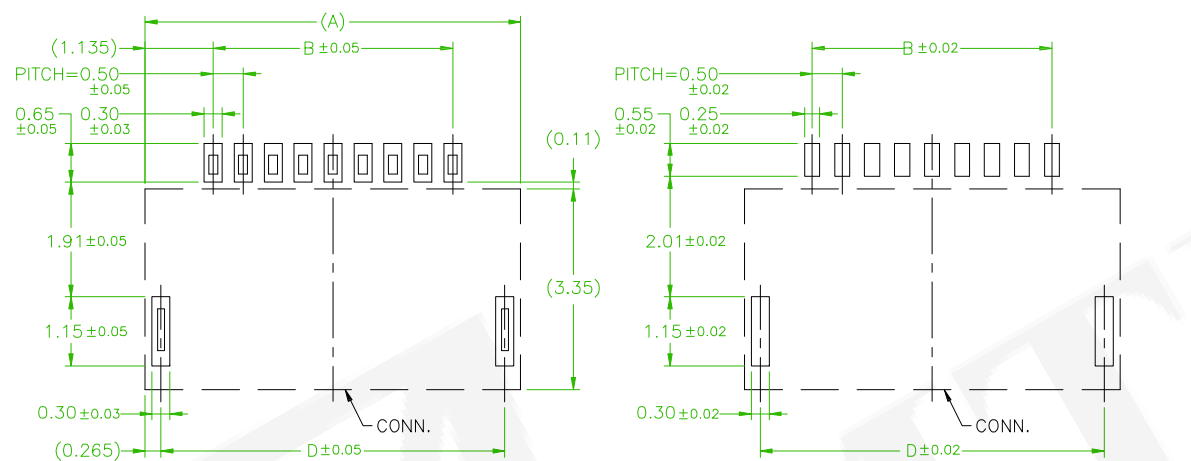

FPC/FFC INSERT DIRECTION
PCB LAYOUT

RECOMMENDED METAL MASK PATTERN(THICKNESS 0.1mm)

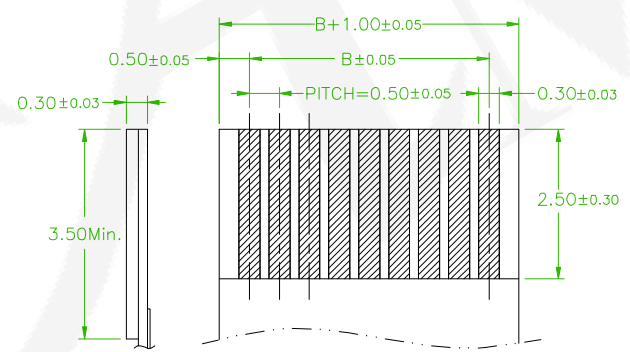

APPLICABLE FPC

NO.OF CONCAC	DIM.A	DIM.B	DIM.D
04	3.77	1.5	3.24
05	4.27	2.0	3.74
06	4.77	2.5	4.24
07	5.27	3.0	4.74
08	5.77	3.5	5.24
09	6.27	4.0	5.74
10	6.77	4.5	6.24
12	7.77	5.5	7.24
13	8.27	6.0	7.74
14	8.77	6.5	8.24
15	9.27	7.0	8.74
16	9.77	7.5	9.24
17	10.27	8.0	9.74
18	10.77	8.5	10.24
19	11.27	9.0	10.74
20	11.77	9.5	11.24
21	12.27	10.0	11.74
22	12.77	10.5	12.24
23	13.27	11.0	12.74
24	13.77	11.5	13.24
26	14.77	12.5	14.24
27	15.27	13.0	14.74
28	15.77	13.5	15.24
29	16.27	14.0	15.74
30	16.77	14.5	16.24
32	17.77	15.5	17.24
33	18.27	16.0	17.74
34	18.77	16.5	18.24
35	19.27	17.0	18.74
36	19.77	17.5	19.24
38	20.77	18.5	20.24
39	21.27	19.0	20.74
40	21.77	19.5	21.24
43	23.27	21.0	22.74
45	24.27	22.0	23.74
50	26.77	24.5	26.24



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FPC/FFC 0.5mm Zif R/A SMT Type				頁數 Page	1/2
品號 PART NO.	5FC4AMRNC-XXG0WUH-01				繪圖 DRAWN	Roy 2016/09/14
圖號 DRAWING NO.	GW030-EA127		版本 REV.	A	核對 CHECKED	Jonny 2016/09/14
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2016/09/14
公差 TOLERANCE	.X ± 0.20 .XX ± 0.15	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

DATE