


SPECIFICATION

Current Rating:0.25 AMP
Insulation Resistance:100M Ω Min.
Contact Resistance:20m Ω Max.
Dielectric Voltage:120V AC for one minute
Operation Temperature:-55 °C to +85 °C



MATERIAL

Insulator:High Temperature Thermoplastic,UL 94V-0
Contact Pin:Copper Alloy

ORDER INFORMATION

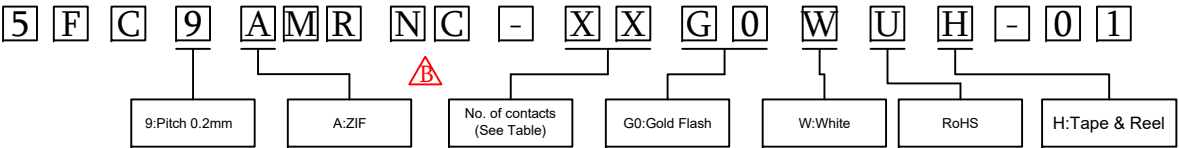

No. of Contacts	Dim. A	Dim. B	Dim. C
60	13.74	11.60	12.47
80	17.74	15.60	16.47
100(A0)	21.74	19.60	20.47
120(C0)	25.74	23.60	24.47

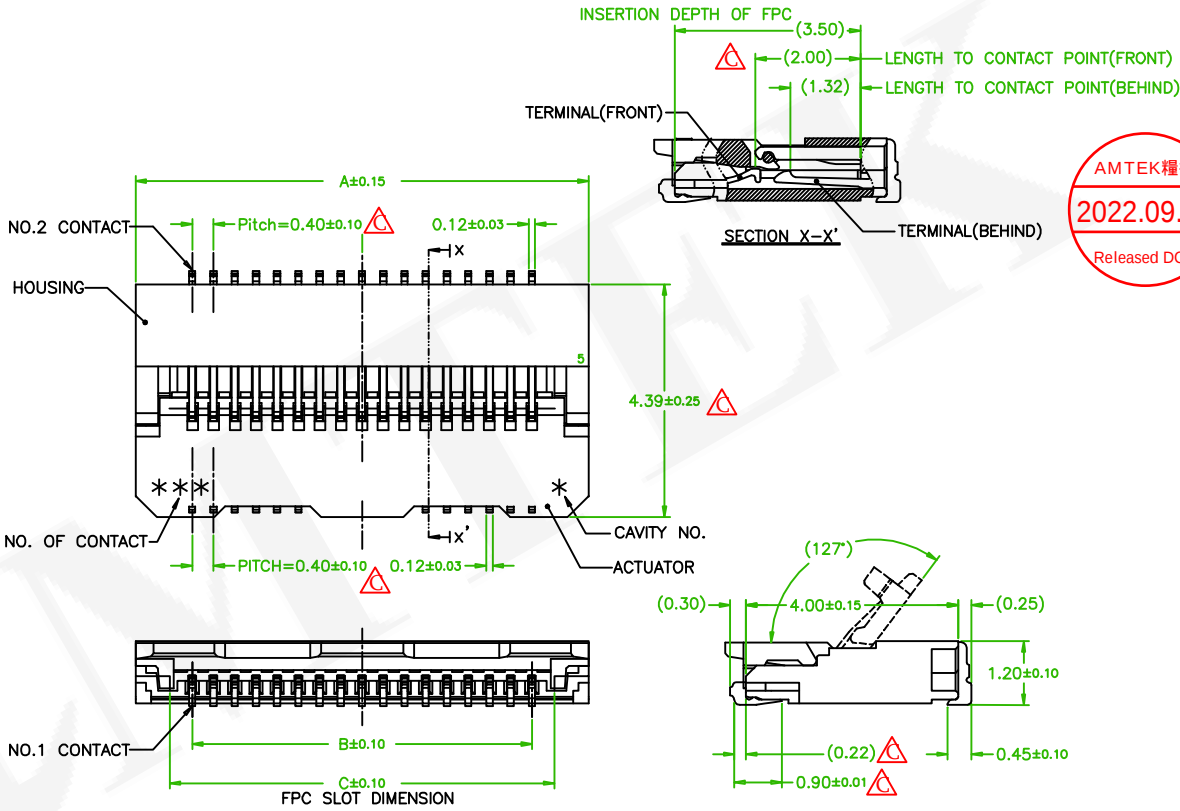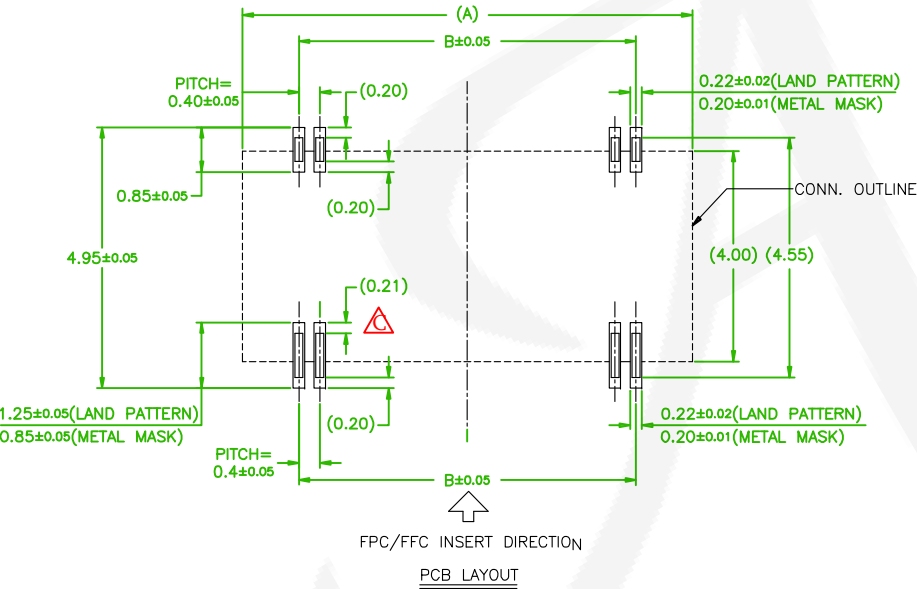

AMTEK 糧德
2022.09.14
Released DCC

Old Part No. : FPC9AMR1C-XX-U



 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FPC/FFC 0.2mm Zif R/A SMT Type				頁數 Page	1/2
	品號 PART NO.	5FC9AMRNC-XXG0WUH-01				繪圖 DRAWN	Roy 2015/09/16
	圖號 DRAWING NO.	GW030-BE097	版本 REV.	C	核對 CHECKED	John 2015/09/16	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/16	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

△	QEC NO.:220902 Revise the Drawing	Benson	2022/09/13
△	Revise the P/N:5FC9AMRUC-XXG0WUX-01->5FC9AMRNC-XXG0WUH-01	Roy	2016/11/07
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE




△△

No. of Contacts	Dim. K	Dim. L	Dim. M
60	13.26	12.40	12.07
80	17.26	16.40	16.07
100(A0)	21.26	20.40	20.07
120(C0)	25.26	24.40	24.07

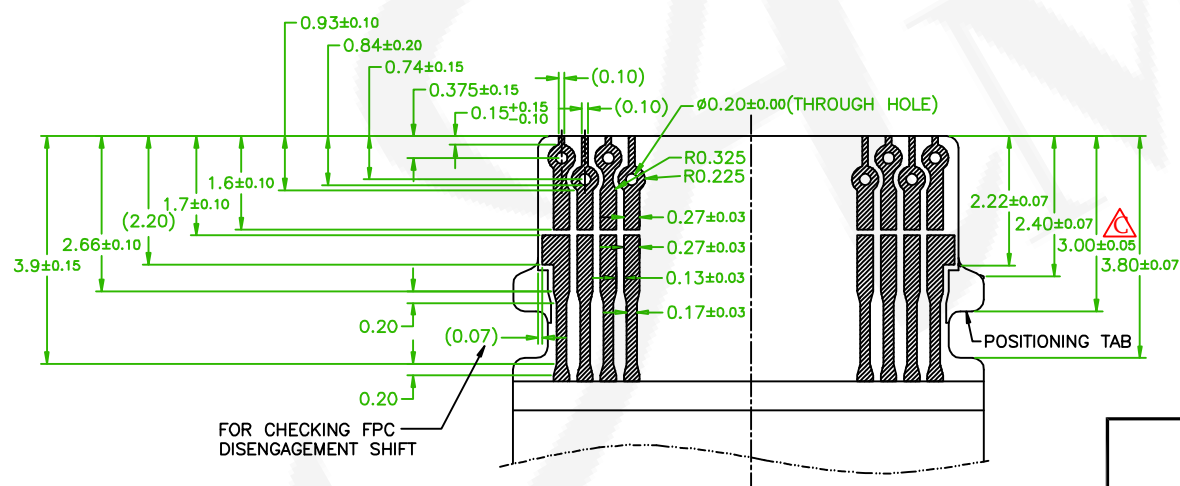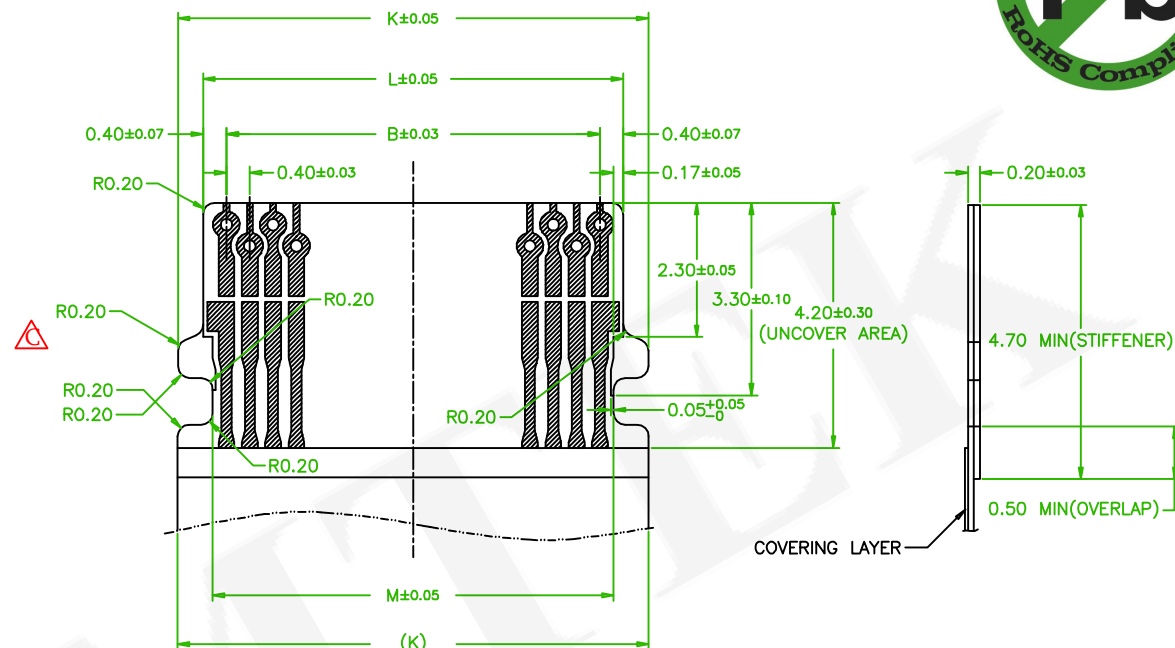

Old Part No. : FPC9AMR1C-XX-U



品名 TITLE	FPC/FFC 0.2mm Zif R/A SMT Type				頁數 Page	2/2
品號 PART NO.	5FC9AMRNC-XXG0WUH-01				繪圖 DRAWN	Roy 2015/09/16
圖號 DRAWING NO.	GW030-BE097	版本 REV.	C	核對 CHECKED	John 2015/09/16	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/16	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

△	QEC NO.:220902 Revise the Drawing	Benson	2022/09/13
△	Revise the P/N:5FC9AMRUC-XXG0WUX-01->5FC9AMRNC-XXG0WUH-01	Roy	2016/11/07
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE