


SPECIFICATION

Current Rating:1 AMP
Insulation Resistance:500M Ω Min.
Contact Resistance:30m Ω Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-25°C to +85°C


MATERIAL

Insulator:PA6T,UL 94V-0
Contact Pin:Phosphor Bronze
Bright Tin plated over Nickel.


ORDER INFORMATION

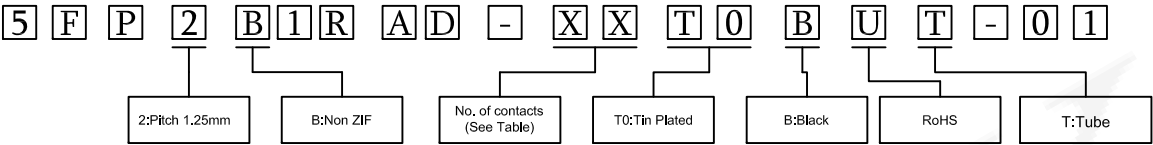




Circuits	Dimension		
	A	B	C
4	8.40	6.30	3.75
5	9.65	7.55	5.00
6	10.90	8.80	6.25
8	13.40	11.30	8.75
10	15.90	13.80	11.25
11	17.15	15.05	12.50
16	23.40	21.30	18.75
17	24.65	22.55	20.00
18	25.90	23.80	21.25
20	28.40	26.30	23.75
24	33.40	31.30	28.75
26	35.90	33.80	31.25
27	37.15	35.05	32.50
28	38.40	36.30	33.75
36	48.40	46.30	43.75

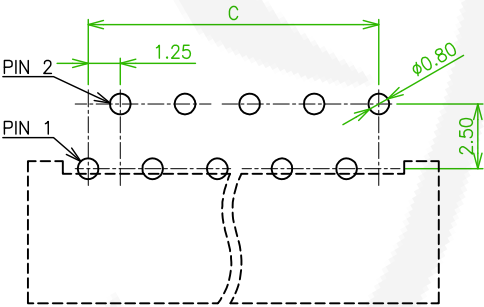

RECOMMENDED PCB LAYOUT

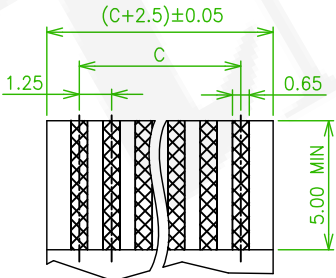

FPC/FFC T=0.30±0.05

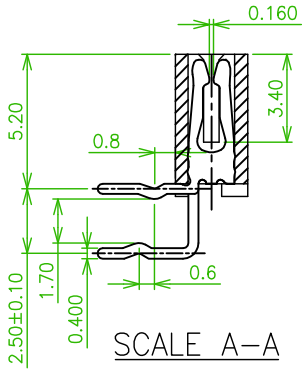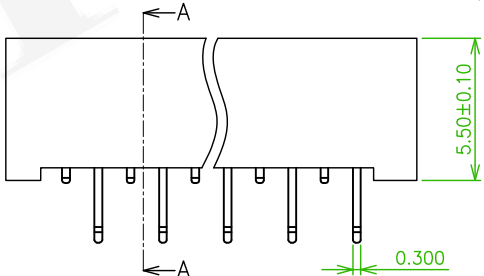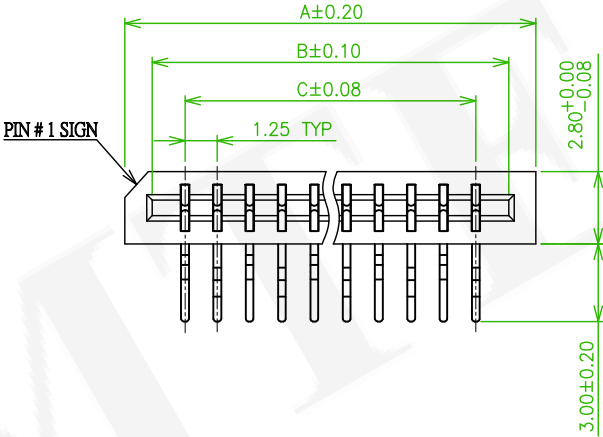

Old P/N:FPC2BR6-XX-A-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FPC/FFC 1.25mm Non Zif R/A Dip Type				頁數 Page	1/1
	品號 PART NO.	5FP2B1RAD-XXT0BUT-01				繪圖 DRAWN	Roy 2016/10/31
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED		Jonny 2016/10/31
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED		Aaron 2016/10/31
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20 .XXX ± 0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION		