


SPECIFICATION

Current Rating:1.0AMP
Insulation Resistance:500M Ω Min.
Contact Resistance:30m Ω Max.
Dielectric Voltage:500V AC/Minute
Operation Temperature:-25°C to +85°C





MATERIAL

Insulator:High Temperature Thermoplastic,UL 94V-0
Contact Pin:Copper Alloy

ORDER INFORMATION

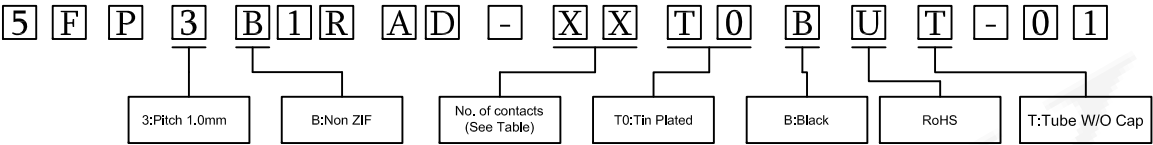

Circuits	Dimension		
	A	B	C
6	8.00	7.10	5.00
8	10.00	9.10	7.00
10	12.00	11.10	9.00
14	16.00	15.10	13.00
16	18.00	17.10	15.00
18	20.00	19.10	17.00

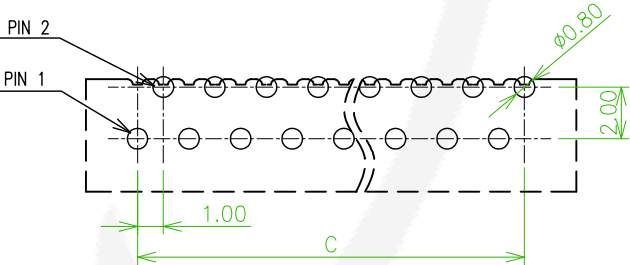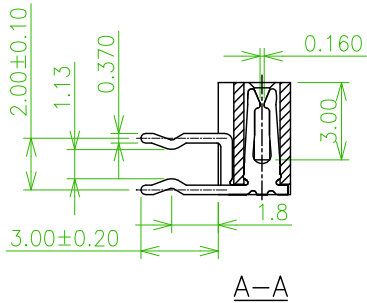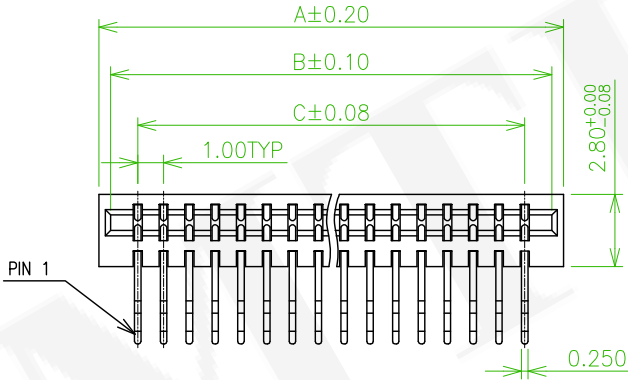

RECOMMENDED PCB LAYOUT

Old Part No. : FPC3BRL6-XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FPC/FFC 1.0mm Non Zif R/A Dip Type				頁數 Page	1/1
	品號 PART NO.	5FP3B1RAD-XXT0BUT-01				繪圖 DRAWN	Roy 2016/05/11
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	John 2016/05/11	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/05/11	
	公差 TOLERANCE	.X ± 0.20 .XX ± 0.10	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	