


SPECIFICATION

Current Rating:1.0AMP
Insulation Resistance:500M Ω Min.
Contact Resistance:30m Ω Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-25°C to +85°C



MATERIAL

Insulator:High Temperature Thermoplastic,UL 94V-0
Contact Pin:Copper Alloy




ORDER INFORMATION

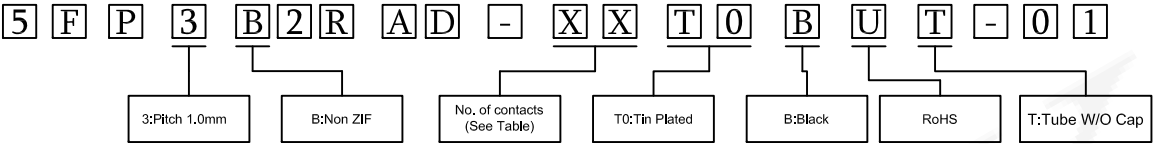

Circuits	Dimension			Circuits	Dimension		
	A	B	C		A	B	C
3	6.00	4.10	2.00	22	25.00	23.10	21.00
4	7.00	5.10	3.00	23	26.00	24.10	22.00
5	8.00	6.10	4.00	24	27.00	25.10	23.00
6	9.00	7.10	5.00	25	28.00	26.10	24.00
7	10.00	8.10	6.00	26	29.00	27.10	25.00
8	11.00	9.10	7.00	28	31.00	29.10	27.00
9	12.00	10.10	8.00	30	33.00	31.10	29.00
10	13.00	11.10	9.00	32	35.00	33.10	31.00
11	14.00	12.10	10.00	34	37.00	35.10	33.00
12	15.00	13.10	11.00				
13	16.00	14.10	12.00				
14	17.00	15.10	13.00				
15	18.00	16.10	14.00				
16	19.00	17.10	15.00				
17	20.00	18.10	16.00				
18	21.00	19.10	17.00				
20	23.00	21.10	19.00				
21	24.00	22.10	20.00				

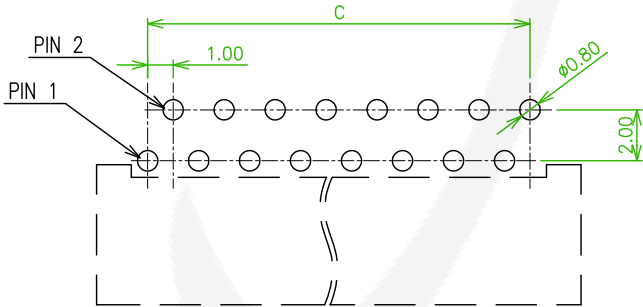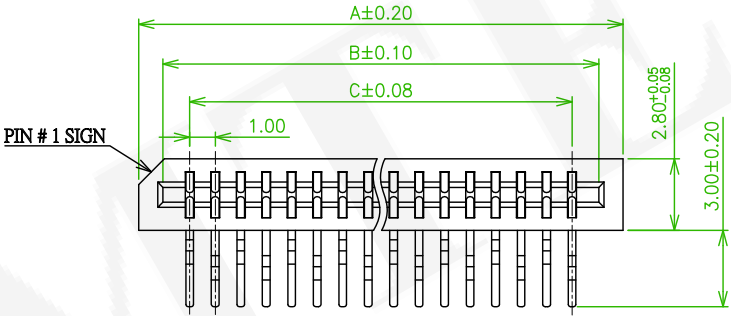

RECOMMENDED PCB LAYOUT

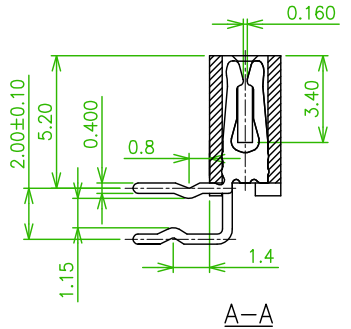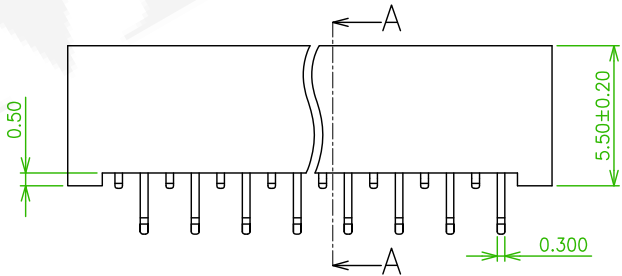

Old Part No. : FPC3BR6-XX-A-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FPC/FFC 1.0mm Non Zif Straight Dip Type			頁數 Page	1/1
	品號 PART NO.	5FP3B2RAD-XXT0BUT-01			繪圖 DRAWN	Roy 2016/10/21
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Jonny 2016/10/21
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/21
	公差 TOLERANCE	.X ± 0.20 .XX ± 0.10	X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION 