

Specifications

Current Rate:0.4 AMP

Voltage Rate:50V

Insulation Resistance:50M Ω Min

Contact Resisistance:30m Ω Max

Dielectric voltage:250V AC for one minute

Operation Temperature:-55°C to +85°C

Material

Insulator:LCP,UL94V-0


Contact Pin:Phosphor Bronze

ORDER INFORMATION


5	F	P	4	A	M	R	B	C	-	X	X	X	X	W	U	H	-	0	1
4:Pitch 0.5mm				A:ZIF			No. of contacts			G0:Gold Plated T0:T:Sn plated			W:White		RoHS		H:T/R W/O Cap		



NO.OF CONTC	DIM.A	DIM.B	DIM.C	DIM.D
04	6.0	1.5	7.5	2.6
05	6.5	2.0	8.0	3.1
06	7.0	2.5	8.5	3.6
07	7.5	3.0	9.0	4.1
08	8.0	3.5	9.5	4.6
09	8.5	4.0	10.0	5.1
10	9.0	4.5	10.5	5.6
11	9.5	5.0	11.0	6.1
12	10.0	5.5	11.5	6.6
13	10.5	6.0	12.0	7.1
14	11.0	6.5	12.5	7.6
15	11.5	7.0	13.0	8.1
16	12.0	7.5	13.5	8.6
17	12.5	8.0	14.0	9.1
18	13.0	8.5	14.5	9.6
19	13.5	9.0	15.0	10.1
20	14.0	9.5	15.5	10.6
21	14.5	10.0	16.0	11.1
22	15.0	10.5	16.5	11.6
23	15.5	11.0	17.0	12.1
24	16.0	11.5	17.5	12.6
25	16.5	12.0	18.0	13.1
26	17.0	12.5	18.5	13.6
27	17.5	13.0	19.0	14.1
28	18.0	13.5	19.5	14.6
29	18.5	14.0	20.0	15.1
30	19.0	14.5	20.5	15.6
31	19.5	15.0	21.0	16.1
32	20.0	15.5	21.5	16.6
33	20.5	16.0	22.0	17.1
34	21.0	16.5	22.5	17.6
35	21.5	17.0	23.0	18.1
36	22.0	17.5	23.5	18.6
37	22.5	18.0	24.0	19.1
38	23.0	18.5	24.5	19.6
39	23.5	19.0	25.0	20.1
40	24.0	19.5	25.5	20.6
41	24.5	20.0	26.0	21.1
42	25.0	20.5	26.5	21.6
43	25.5	21.0	27.0	22.1
44	26.0	21.5	27.5	22.6
45	26.5	22.0	28.0	23.1
46	27.0	22.5	28.5	23.6
47	27.5	23.0	29.0	24.1
48	28.0	23.5	29.5	24.6
49	28.5	24.0	30.0	25.1
50	29.0	24.5	30.5	25.6



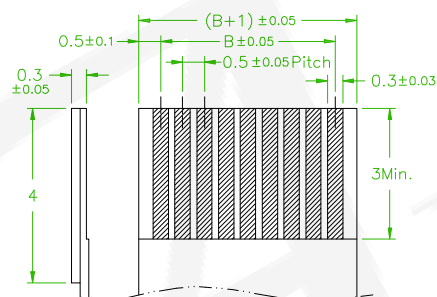


Applicable FPC

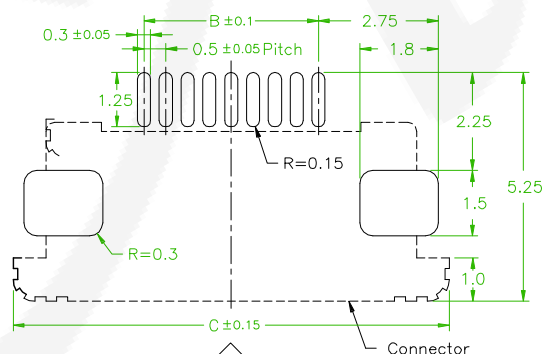

FPC/FFC INSERT DIRECTION

PCB Layout

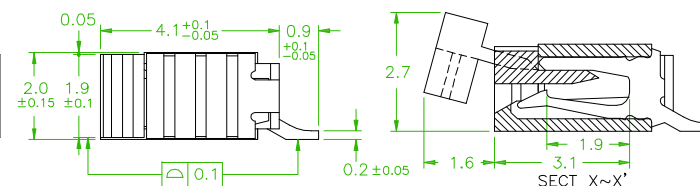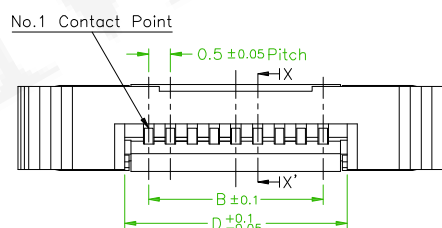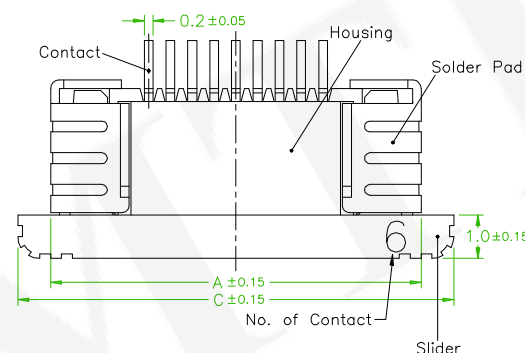


Old Part No. :FPC4AMR1-XX-B-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FPC/FFC 0.5mm Zif R/A SMT Type				頁數 Page	1/2
	品號 PART NO.	5FP4AMRBC-XXXXWUH-01				繪圖 DRAWN	Roy 2016/07/19
	圖號 DRAWING NO.	GW030-EA128				核對 CHECKED	Boris 2016/07/19
	客戶品號 CUSTOMER P/N					承認 APPROVED	Boris 2016/07/19
	公差 TOLERANCE					單位 UNIT	mm THIRD ANGLE PROJECTION

NO.OF CONTAC	DIM.A	DIM.B	DIM.C
4-23	24	11.5	-----
24-33	32	14.2	28.4
34-50	44	20.2	40.4

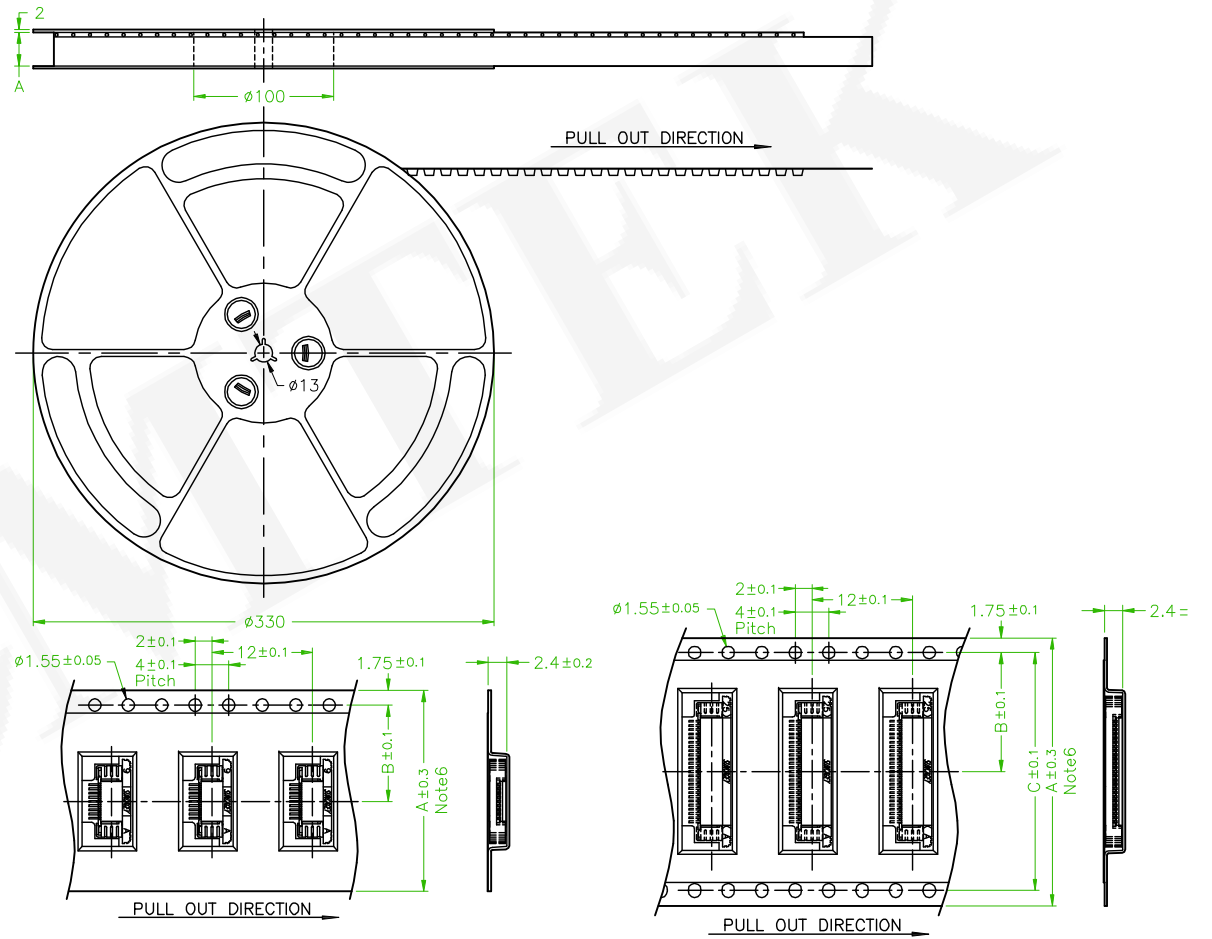

Old Part No. :FPC4AMR1-XX-B-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	TITLE	FPC/FFC 0.5mm Zif R/A SMT Type				頁數 Page	2/2
	品號 PART NO.	5FP4AMRBC-XXXXWUH-01				繪圖 DRAWN	Roy 2016/07/19
	圖號 DRAWING NO.	GW030-EA128				核對 CHECKED	Boris 2016/07/19
	客戶品號 CUSTOMER P/N					承認 APPROVED	Boris 2016/07/19
	公差 TOLERANCE					THIRD ANGLE PROJECTION	
		版本 REV.	A	比例 SCALE	None		
		單位 UNIT	mm				