

SPECIFICATION

Current Rating:0.4 AMP

Insulation Resistance:50M Ω Min.

Contact Resistance:30m Ω Max.

Dielectric Voltage:250V AC/Minute


Operation Temperature:-55 °C to +85 °C

MATERIAL

Insulator:High Temperature Thermoplastic,UL 94V-0(Halogen Free)

Contact Pin:Copper Alloy

ORDER INFORMATION

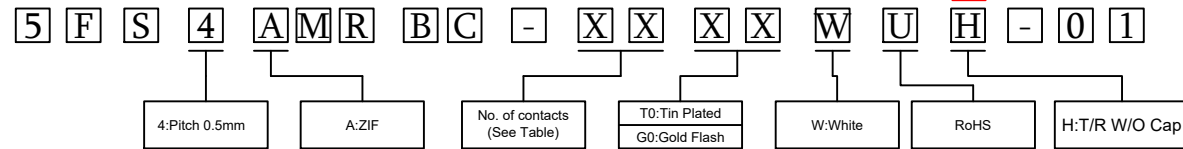


AMTEK 羅德




2021.12.06

Released DCC

No. of Contact	Dim.A	Dim.B	Dim.C	Dim.D
4	6.75	1.5	8	2.6
5	7.25	2	8.5	3.1
6	7.75	2.5	9	3.6
8	8.75	3.5	10	4.6
10	9.75	4.5	11	5.6
12	10.75	5.5	12	6.6
14	11.75	6.5	13	7.6
15	12.25	7	13.5	8.1
16	12.75	7.5	14	8.6
18	13.75	8.5	15	9.6
20	14.75	9.5	16	10.6
22	15.75	10.5	17	11.6
24	16.75	11.5	18	12.6
26	17.75	12.5	19	13.6
28	18.75	13.5	20	14.6
30	19.75	14.5	21	15.6
32	20.75	15.5	22	16.6
33	21.25	16	22.5	17.1
34	21.75	16.5	23	17.6
35	22.25	17	23.5	18.1
36	22.75	17.5	24	18.6
39	24.25	19	25.5	20.1
40	24.75	19.5	26	20.6
44	26.75	21.5	28	22.6
45	27.25	22	28.5	23.1
50	29.75	24.5	31	25.6

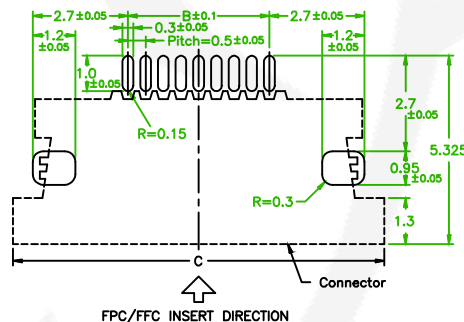

Recommended PCB Board Hole Layout

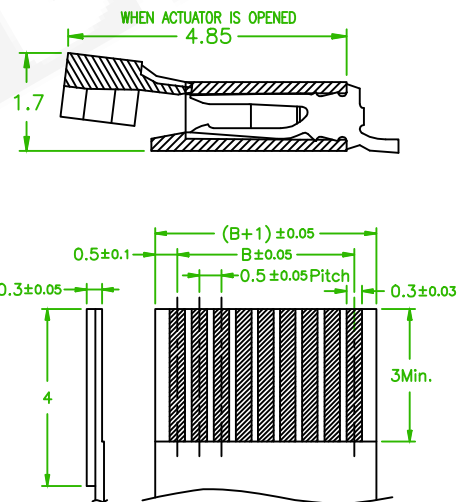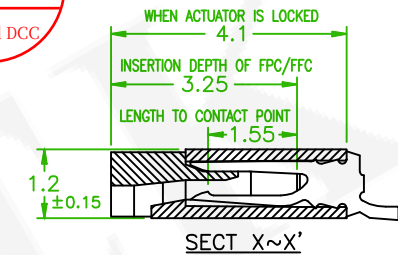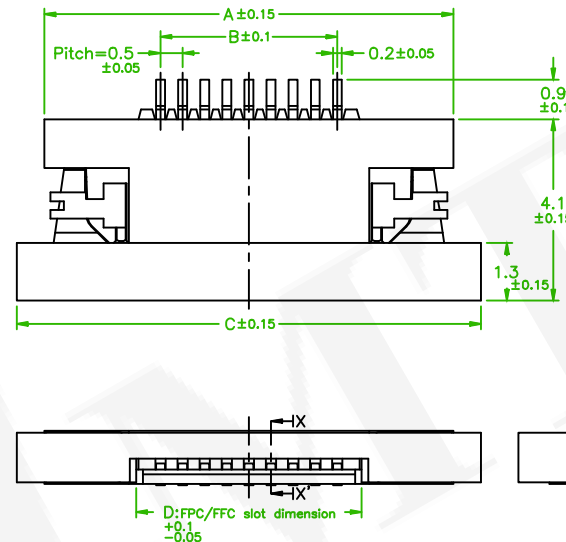

Old Part No. : FPC4AMRT1-XX-B-U

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FPC/FFC 0.5mm Zif Slim R/A SMT Type				頁數 Page	1/1
	品號 PART NO.	5FS4AMRBC-XXXXWUH-01				繪圖 DRAWN	Roy 2015/09/15
	圖號 DRAWING NO.	GW030-RL392		版本 REV.	D	核對 CHECKED	John 2015/09/15
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	John 2015/09/15
	公差 TOLERANCE	.X $\pm$ 0.10 .XX $\pm$ 0.05	.X $\pm$ 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	QEC NO.:211201 Revise the drawing	Alice	2021/12/03
	Revise the Table	C	2017/01/24 Roy
	Revise the drawing	B	2016/04/26 Roy
	ECN NO. OR DESCRIPTION	REVISED	DATE