


SPECIFICATION

Current Rating:0.4 AMP
Insulation Resistance:50M Ω Min.
Contact Resistance:30m Ω Max.
Dielectric Voltage:250V AC/Minute
Operation Temperature:-55 °C to +85 °C

MATERIAL

Insulator:High Temperature Thermoplastic,UL 94V-0(Halogen Free)
Contact Pin:Copper Alloy

ORDER INFORMATION




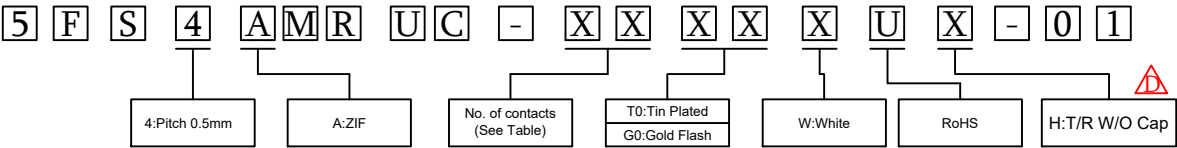


AMTEK 糧德




2023.06.13

Released DCC

No. of Contacts	Dimensions(mm)			
	A	B	C	D
04	6.75	1.50	8.00	2.60
05	7.25	2.00	8.50	3.10
06	7.75	2.50	9.00	3.60
08	8.75	3.50	10.00	4.60
10	9.75	4.50	11.00	5.60
12	10.75	5.50	12.00	6.60
14	11.75	6.50	13.00	7.60
15	12.25	7.00	13.50	8.10
16	12.75	7.50	14.00	8.60
18	13.75	8.50	15.00	9.60
20	14.75	9.50	16.00	10.60
22	15.75	10.50	17.00	11.60
24	16.75	11.50	18.00	12.60
26	17.75	12.50	19.00	13.60
28	18.75	13.50	20.00	14.60
30	19.75	14.50	21.00	15.60
32	20.75	15.50	22.00	16.60
33	21.25	16.00	22.50	17.10
34	21.75	16.50	23.00	17.60
35	22.25	17.00	23.50	18.10
36	22.75	17.50	24.00	18.60
39	24.25	19.00	25.50	20.10
40	24.75	19.50	26.00	20.60
44	26.75	21.50	28.00	22.60
45	27.25	22.00	28.50	23.10
50	29.75	24.50	31.00	25.60

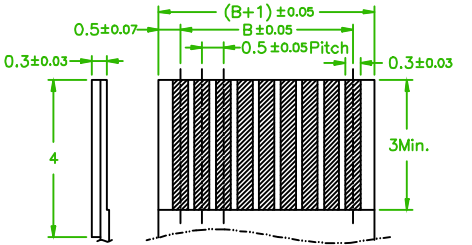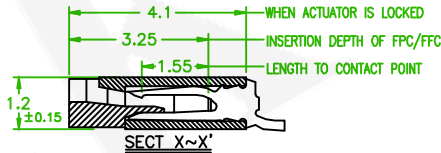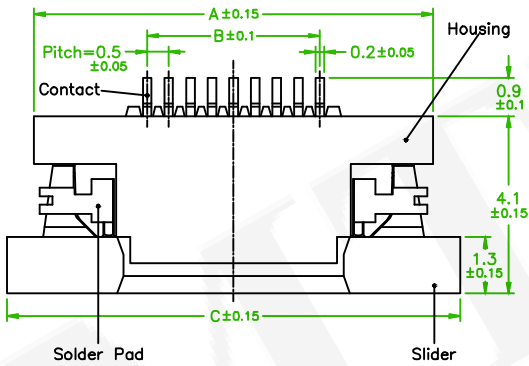

Applicable FPC

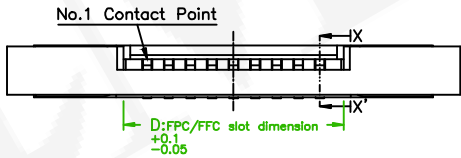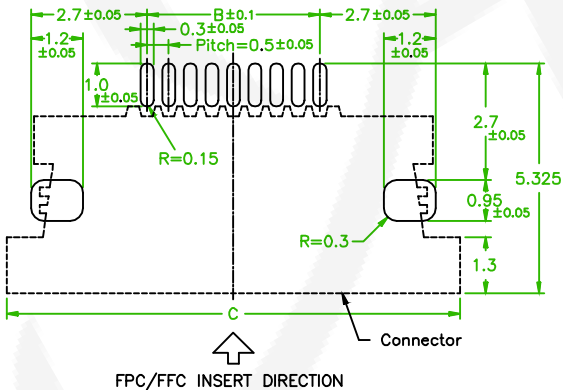

Old Part No. : FPC4AMRT1-XX-U-U

△	QEC NO.:230601 Revise the drawing	Alice	2023/06/07
△	Revise the Table	C	2017/01/24 Roy
△	Revise the drawing	B	2016/04/26 Roy
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK
糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FPC/FFC 0.5mm Zif Slim R/A SMT Type				頁數 Page	1/1
品號 PART NO.	5FS4AMRUC-XXXXXXUX-01				繪圖 DRAWN	Roy 2015/09/15
圖號 DRAWING NO.	GW030-RL391	版本 REV.	D	核對 CHECKED	John 2015/09/15	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/15	
公差 TOLERANCE	.X ± 0.20 .XX ± 0.10	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	