

MATERIAL

Contact Pin:Brass

Note

- 1.THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
- 2.FINSH : TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.


ORDER INFORMATION

5 G B F - 0 0 2 X X - A X

◎:Standard Recommend

T0:Tin Plated
◎TM:Matte Tin

See Table

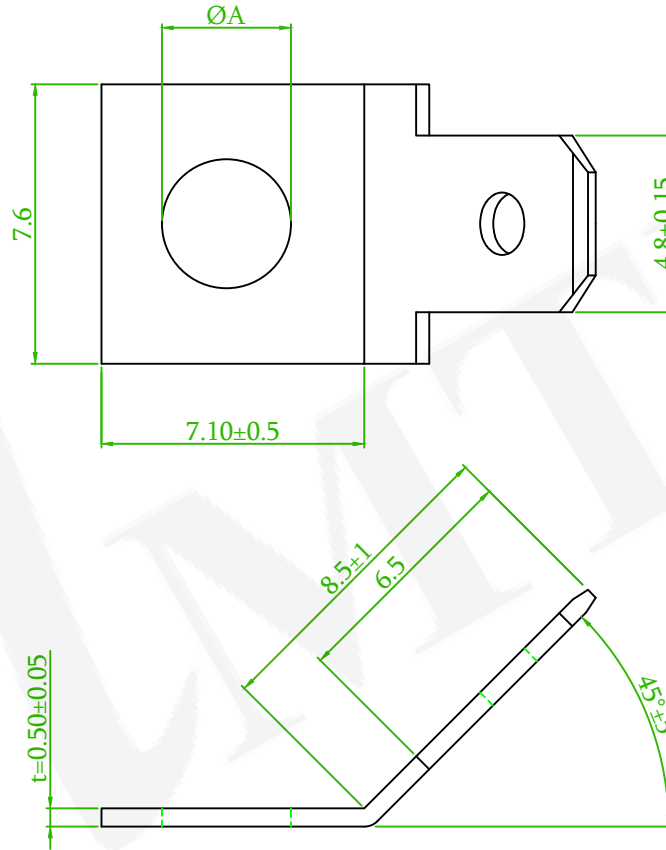

(RoHS Compliant)

★ Pb	<1000PPM
★ Cd	< 100PPM
★ Hg	<1000PPM
★ Cr6+	<1000PPM
★ PBBs	<1000PPM
★ PBDEs	<1000PPM

PART NO.	A
5GBF-002XX-A1	Ø3.7
5GBF-002XX-A2	Ø4.3
5GBF-002XX-A3	Ø5.3

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	P.C.B Terminal				頁數 Page	1/1
品號 PART NO.	5GBF-002XX-AX			繪圖 DRAWN	Nick 2019/12/30	
圖號 DRAWING NO.	GW018-NI666	版本 REV.	B	核對 CHECKED	Josh 2019/12/30	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/12/30	
公差 TOLERANCE	± 0.2	單位 UNIT	mm	THIRD ANGLE PROJECTION		

QEC NO.:231104 Revise the Plating Options

Gaby 2023/11/23



REV. ECN NO. OR DESCRIPTION

REVISED DATE