

### MATERIAL

Contact Pin:Brass

### NOTE


- 1.THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
- 2.FINISH:TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
- 3.SUGGEST RATED CURRENT:15A.

### ORDER INFORMATION

5 G B M - 0 2 7 X X - A 1

◎:Standard Recommend

T0:Tin Plated  
◎TM:Matte Tin

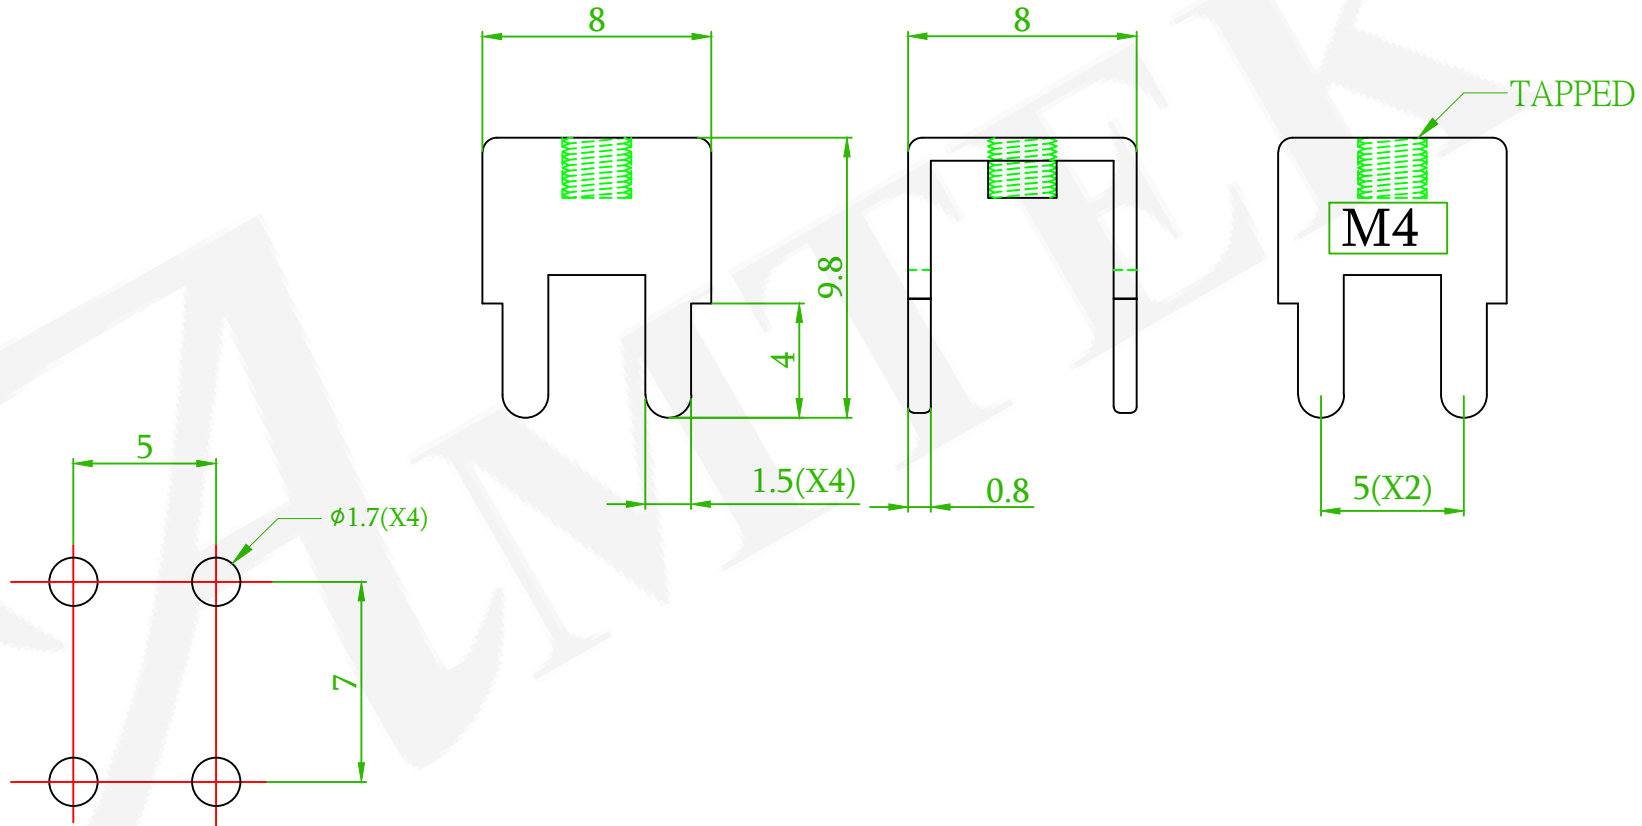

MOUNTING HOLE

(RoHS Compliant)

★ Pb	<1000PPM
★ Cd	< 100PPM
★ Hg	<1000PPM
★ Cr6+	<1000PPM
★ PBBs	<1000PPM
★ PBDEs	<1000PPM

耀德精密有限公司  
Amtek Technology Co., Ltd.  
TEL: 886-2-2260-6878  
FAX: 886-2-2260-8030

品名 TITLE	P.C.B TERMINAL				頁數 Page	1/1
品號 PART NO.	5GBM-027XX-A1			繪圖 DRAWN	Nick 2019/12/31	
圖號 DRAWING NO.	GW018-NI727	版本 REV.	B	核對 CHECKED	Josh 2019/12/31	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/12/31	
公差 TOLERANCE	±0.2	單位 UNIT	mm	THIRD ANGLE PROJECTION		

QEC NO.:231104 Revise the Plating Options

Gaby 2023/11/27

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
------	------------------------	---------	------