

MATERIAL

Contact Pin: Brass


ORDER INFORMATION

5 G B M - 0 3 2 X X - A X


◎: Standard Recommend

T0: Tin Plated
◎TM: Matte Tin

01: M3x0.5P
02: M4x0.7P

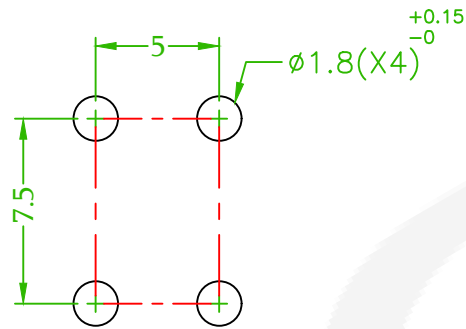

MOUNTING HOLES

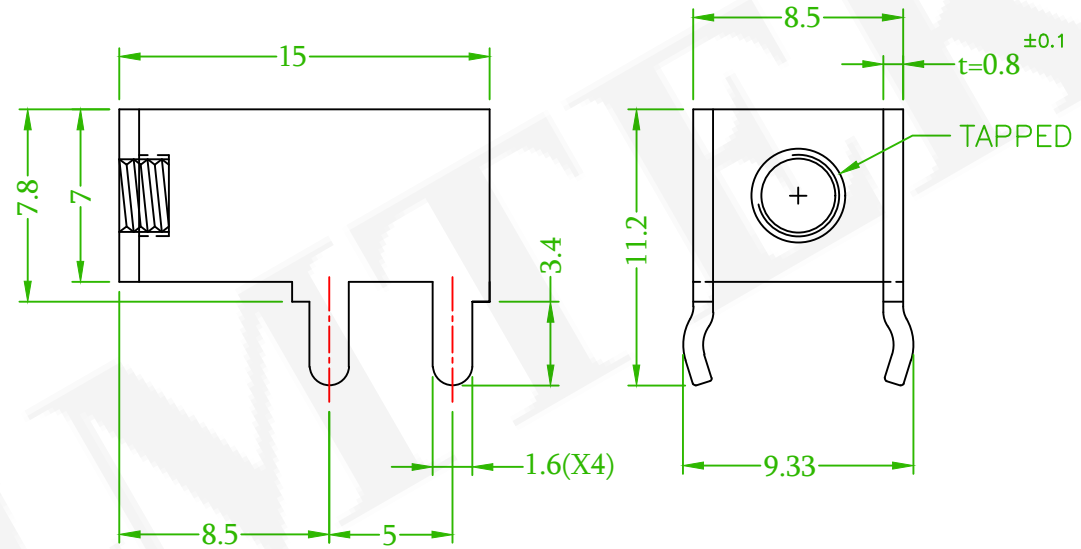

(RoHS Compliant)	
Pb	<1000PPM
Cd	< 100PPM
Hg	<1000PPM
Cr6+	<1000PPM
PBBs	<1000PPM
PBDEs	<1000PPM

- NOTE: 1. BEST USE DATE FOR TIN PLATED PARTS ARE WITHIN THREE MONTHS SINCE MFG DATE.
2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
3. LOAD CURRENT: 15A

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	P.C.B Terminal				頁數 Page	1/1
品號 PART NO.	5GBM-032XX-AX			繪圖 DRAWN	Benson 2019/12/30	
圖號 DRAWING NO.	GW018-BS620	版本 REV.	B	核對 CHECKED	Josh 2019/12/30	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/12/30	
公差 TOLERANCE	±0.2	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	QEC NO.:231104 Revise the Plating Options	Gaby	2023/11/28