

MATERIAL


Contact Pin: PHOSPHOR BRONZE

ORDER INFORMATION

5 G B M - 0 4 2 X X - A 1


◎:Standard Recommend

T0: Tin Plated
◎TM: Matte Tin

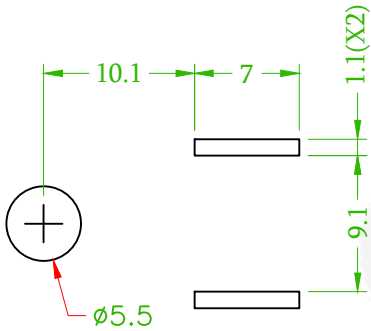


MOUNTING HOLES

M5X0.8P EXTRUDE AND TAPPING

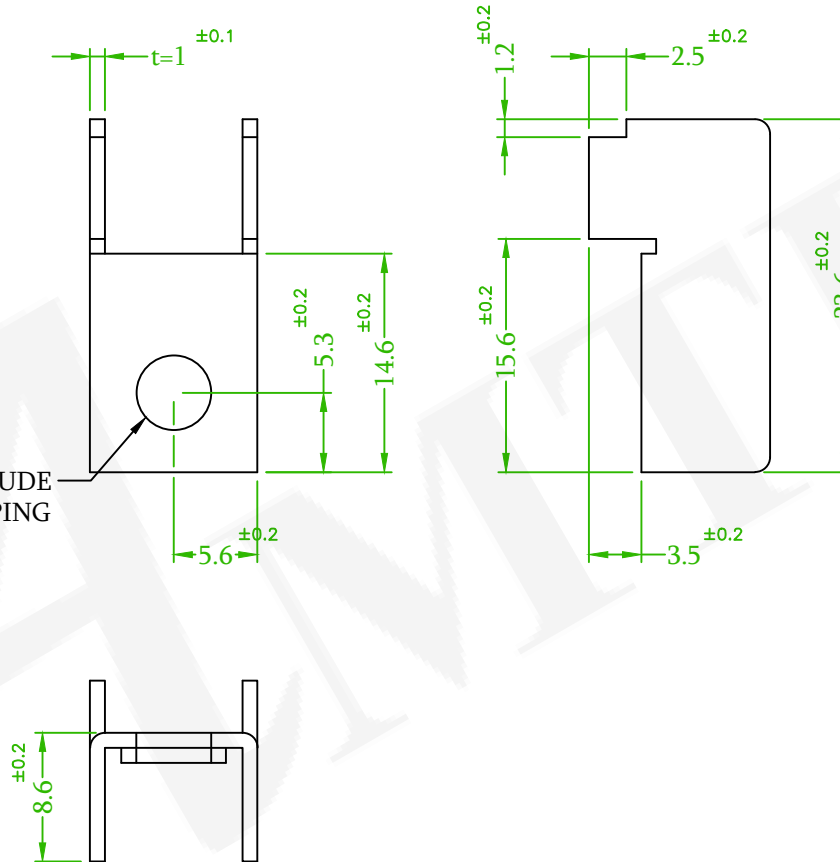

NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.

(RoHS Compliant)	
Pb	<1000PPM
Cd	< 100PPM
Hg	<1000PPM
Cr6+	<1000PPM
PBBs	<1000PPM
PBDEs	<1000PPM

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	P.C.B Terminal			頁數 Page	1/1	
	品號 PART NO.	5GBM-042XX-A1		繪圖 DRAWN	Benson 2020/01/02		
	圖號 DRAWING NO.	GW018-BS636	版本 REV.	B	核對 CHECKED	Josh 2020/01/02	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/01/02	
	公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		

△	QEC NO.:231104 Revise the Plating Options	Gaby	2023/12/08
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE