

MATERIAL

Contact Pin: Brass

ORDER INFORMATION

5 G B R - 0 0 9 X X - A 1

◎:Standard Recommend

T0: Tin Plated
◎ TM: Matte Tin




t=0.8 ±0.05


AMTEK 糧德

2023.12.20

Released DCC



MOUNTING HOLES

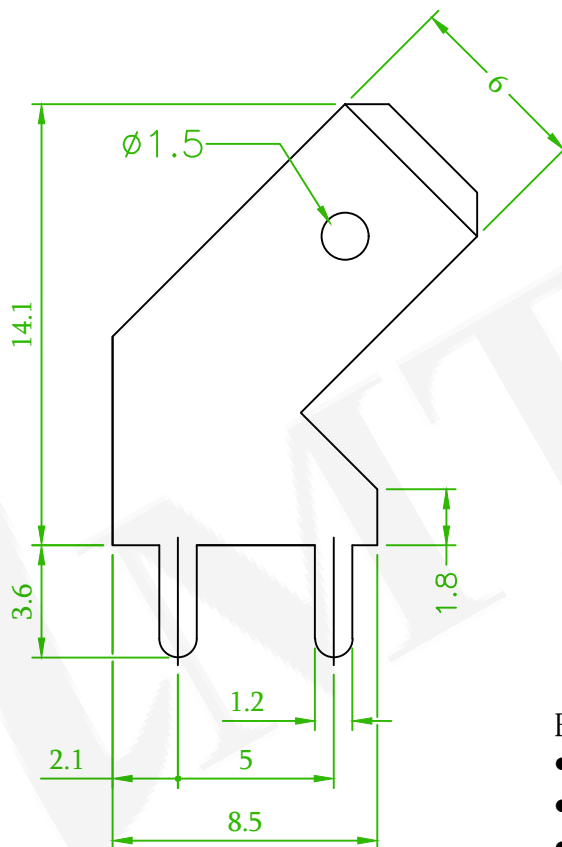

Electrical:

- Voltage rating: 250V
- Current rating: 30A
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C ± 10°C / 5 Sec

(RoHS Compliant)

Pb	<1000PPM
Cd	< 100PPM
Hg	<1000PPM
Cr6+	<1000PPM
PBBs	<1000PPM
PBDEs	<1000PPM

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	P.C.B Terminal				頁數 Page	1/1
品號 PART NO.	5GBR-009XX-A1			繪圖 DRAWN	Benson 2020/01/08	
圖號 DRAWING NO.	GW018-BS734	版本 REV.	B	核對 CHECKED	Josh 2020/01/08	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/01/08	
公差 TOLERANCE	±0.3	單位 UNIT	mm	THIRD ANGLE PROJECTION		

△	QEC NO.:231104 Revise the Plating Options	Gaby	2023/12/08
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE