

SPECIFICATIONS




Current Rating: 0.7A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 50mΩ Max
Insulation Resistance: 100MΩ Min
Withstanding Voltage: 500V AC/minute
Material:Nylon 46,UL94V-0

ORDER INFORMATION

5	H	0	5	0	5	N	0	-	1	X	X	B	A	U	0	0	A	0	1
Pitch 0.50mm				N:Other			No. of contacts per row			B:Black		A:Tray Without CAP			RoHS				



Amtek
2017.08.29
文管中心

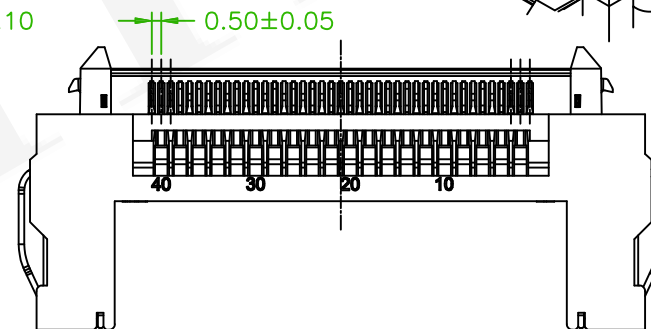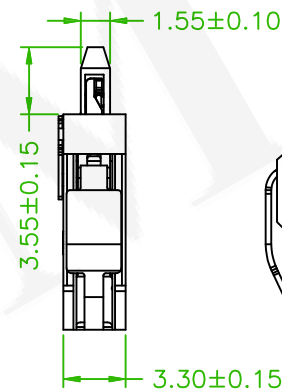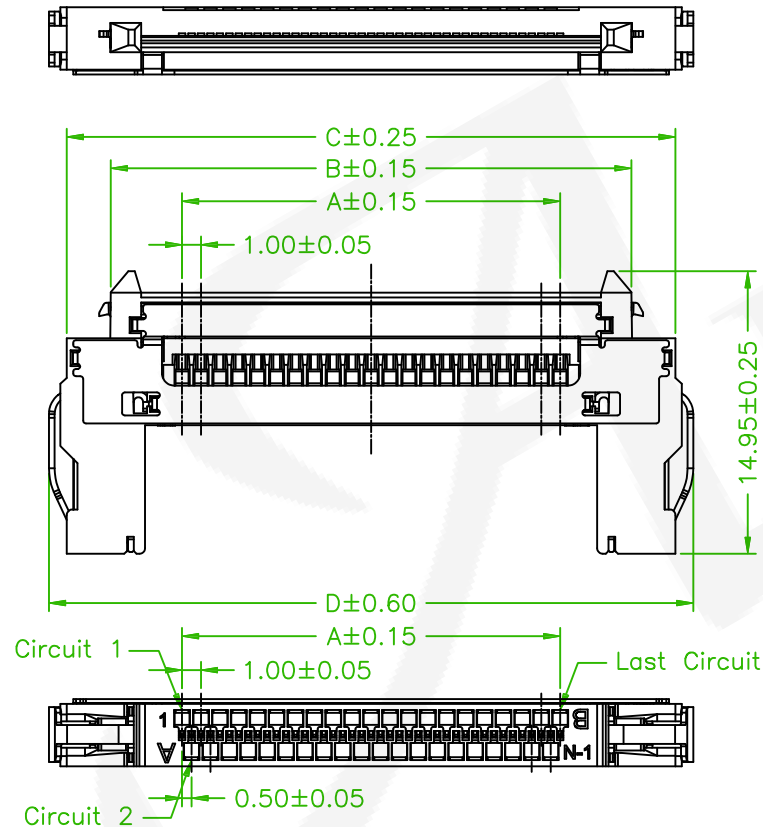

Circuit No.	Dimensions			
	A	B	C	D
21P	10.00	17.54	22.20	24.34
31P	15.00	22.54	27.20	29.34
41P	20.00	27.54	32.20	34.34
51P	25.00	32.54	37.20	39.34

Old Part No.:0505H-XXB-U

No.	Description	Material	Color
1	Insulator	Nylon 46, UL94V-0	Natural(Black)
2	Ground plate	Stainless	---
3	Lock lever	Stainless	---



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	0.50mm HOUSING				頁數 Page	1/1
品號 PART NO.	5H0505N0-1XXBAU00A01			繪圖 DRAWN	Eloise 2016/11/29	
圖號 DRAWING NO.	GW090-EL003		版本 REV.	A	核對 CHECKED	Jonny 2016/11/29
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2016/11/29
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15		單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE