

SPECIFICATIONS

Current Rating: 0.7A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 50m Ω Max
Insulation Resistance: 100M Ω Min
Withstanding Voltage: 500V AC/minute

ORDER INFORMATION

5 H 0 5 0 5 N 1 - 1 X X B A U 0 0 A 0 1

Pitch 0.50mm

N:Other

No. of contacts
per row


B:Black

A:Tray
Without CAP


RoHS







Amtek
2017.08.23
文管中心

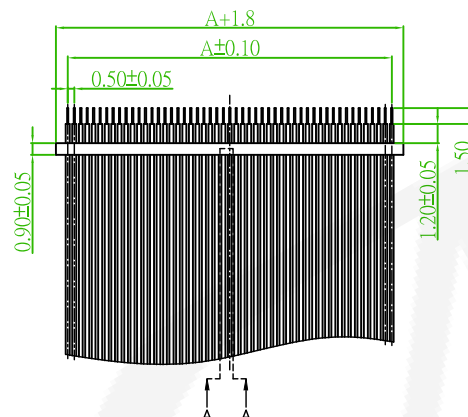

CABLE ASSEMBLED CONDITION(REF.)

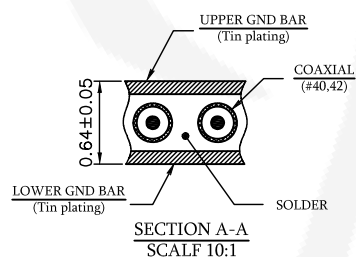

Circuit No.	Dimensions			
	A	B	C	D
21P	10.00	17.40	21.25	24.45
31P	15.00	22.40	26.25	29.45
41P	20.00	27.40	31.25	34.45
51P	25.00	32.40	36.25	39.45

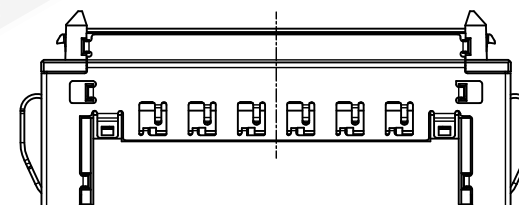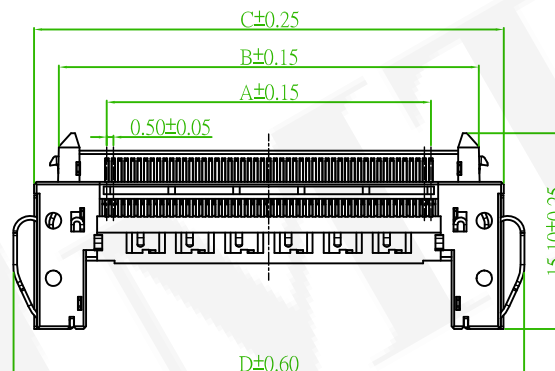

No.	Description	Material	Color
1	Insulator	LCP,UL94V-0	(Natural)Black
2	Ground Plate	Copper Alloy / Tin Plated	---
3	Lock Lever	Stainless	---
4	Terminal	Copper Alloy / Gold plated on contact area ; Tin plated on solder area	---

Old Part No.:0505HA-XXB-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	0.50mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H0505N1-1XXBAU00A01				繪圖 DRAWN	Joe 2009/08/24
	圖號 DRAWING NO.	GW090-EL004	版本 REV.	A	核對 CHECKED	Paul 2009/08/24	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2009/08/24	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		