

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 100MΩ Min

Withstanding Voltage: 500V AC/minute

Material:Nylon 66,UL94V-0

ORDER INFORMATION

5 H 1 0 0 1 N 0 - 2 X X W B L 0 0 A 0 1

Pitch 1.00mm

No. of contacts
per row




W:White

B:Bag Package

RoHS



Circuit No.	Dimensions		
	A	B	C
2X05P	4.00	8.00	5.35
2X06P	5.00	9.00	6.35
2X08P	7.00	11.00	8.35
2X09P	8.00	12.00	9.35
2X10P	9.00	13.00	10.35
2X15P	14.00	18.00	15.35
2X20P	19.00	23.00	20.35
2X25P	24.00	28.00	25.35

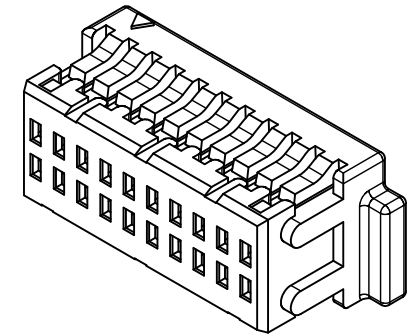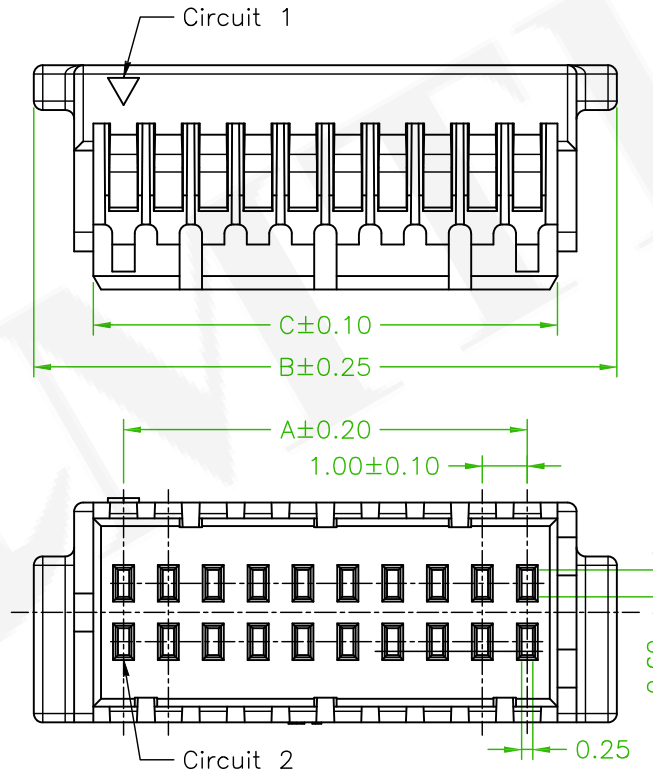

Old Part No.:1001H-2XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.00mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H1001N0-2XXWBL00A01				繪圖 DRAWN	Roy 2016/08/17
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Boris 2016/08/17	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/08/17	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	.X° ± 1°	單位 UNIT	mm	THIRD ANGLE PROJECTION	