

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 100MΩ Min

Withstanding Voltage: 500V AC/minute

Material:Nylon 66,UL94V-0

ORDER INFORMATION

5 H 1 0 0 1 N 1 - 1 X X W B L 0 0 A 0 1

Pitch 1.00mm


1:With Ear

No. of contacts
per row



W:White

B:Bag Package

RoHS

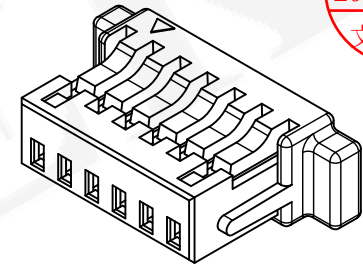

Circuit No.	Dimensions			Circuit No.	Dimensions		
	A	B	C		A	B	C
02P	1.00	5.00	2.35	12P	11.00	15.00	12.35
03P	2.00	6.00	3.35	13P	12.00	16.00	13.35
04P	3.00	7.00	4.35	14P	13.00	17.00	14.35
05P	4.00	8.00	5.35	15P	14.00	18.00	15.35
06P	5.00	9.00	6.35	16P	15.00	19.00	16.35
07P	6.00	10.00	7.35	17P	16.00	20.00	17.35
08P	7.00	11.00	8.35	18P	17.00	21.00	18.35
09P	8.00	12.00	9.35	19P	18.00	22.00	19.35
10P	9.00	13.00	10.35	20P	19.00	23.00	20.35
11P	10.00	14.00	11.35	24P	23.00	27.00	24.35

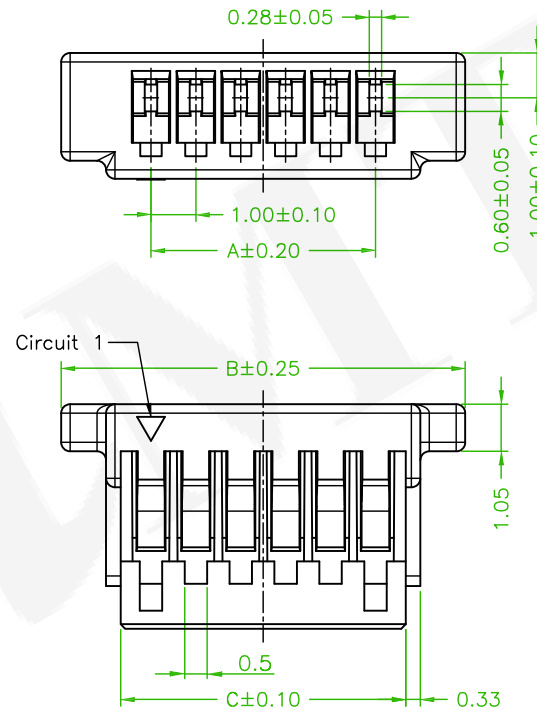

Old Part No.:1001H-1XXW1-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.00mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H1001N1-1XXWBL00A01				繪圖 DRAWN	Roy
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED		Boris
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED		Boris
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	.X° ± 1°	單位 UNIT	mm	THIRD ANGLE PROJECTION	