

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 30mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 500V AC/minute

MATERIAL

Shell: Phosphor Bronze

Material: Nylon 66,UL94V-0

ORDER INFORMATION

5 H 1 0 0 3 N 0 - 1 X X W T U 0 0 A 0 1

Pitch 1.00mm





N:Other

No. of contacts
per row

W:White

T:Tube
Without CAP

RoHS

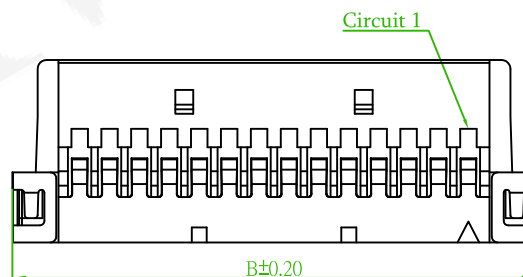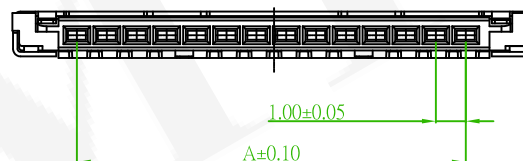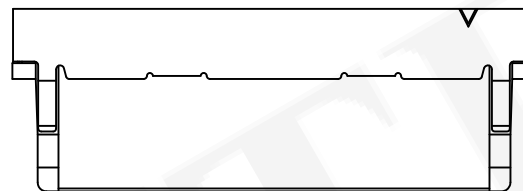

Amtek
2017.08.29
文管中心

No. of Contacts	Dimensions	
	A	B
08	7.00	11.50
14	13.00	17.50
20	19.00	23.50
30	29.00	33.50

Old Part No.:1003H-XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.0mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H1003N0-1XXWTU00A01				繪圖 DRAWN	Volvo 04/15/2008
	圖號 DRAWING NO.	GW090-EL018	版本 REV.	A	核對 CHECKED	Paul 04/15/2008	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 04/15/2008	
	公差 TOLERANCE	.X ± 0.20 .XX ± 0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION		