

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 200V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 40m Ω Max




Insulation Resistance: 100M Ω Min

Withstanding Voltage: 500V AC/minute

Material: Nylon 46,UL94V-0

ORDER INFORMATION

5	H	1	0	0	4	M	0	-	1	3	0	W	A	U	0	0	A	0	1
Pitch 1.00mm					M:Male Type			No. of contacts per row			W:White		A:Tray Without CAP			RoHS			

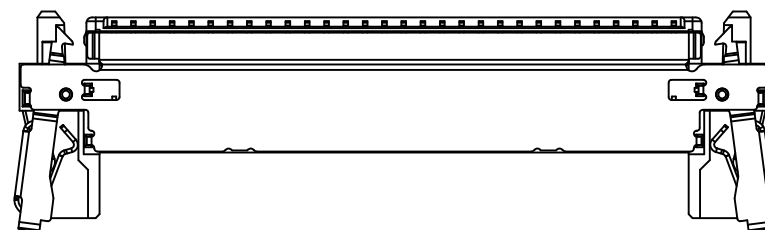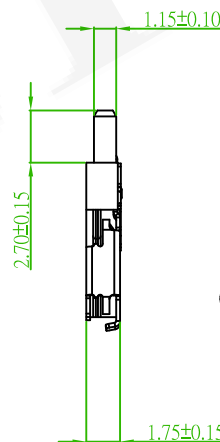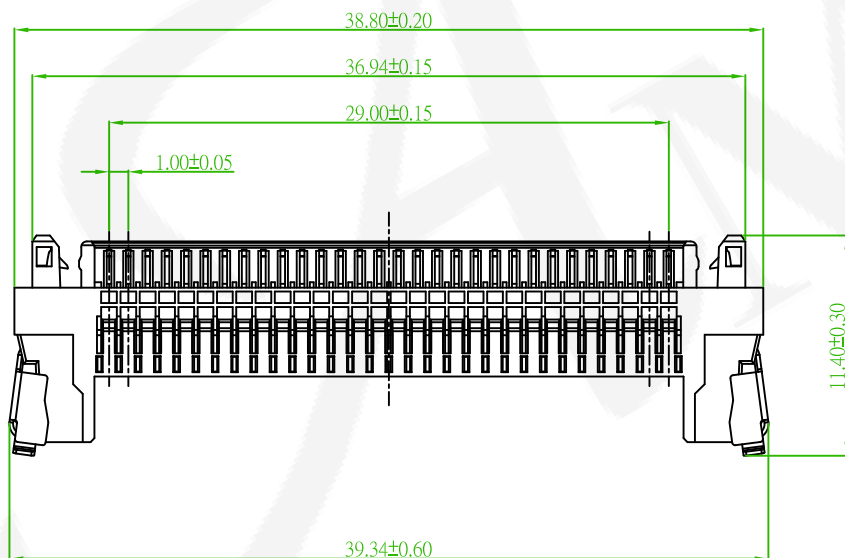

Old Part No.:1004H-30W-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	1.0mm HOUSING				頁數 Page	1/1
品號 PART NO.	5H1004M0-130WU00A01				繪圖 DRAWN	Vincent 2007/12/24
圖號 DRAWING NO.	GW090-EL020	版本 REV.	A	核對 CHECKED	Paul 2007/12/24	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2007/12/24	
公差 TOLERANCE	.X ± 0.20 .XX ± 0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION		