

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.





Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: PBT,UL94V-0

ORDER INFORMATION

5	H	1	2	5	0	N	0	-	1	X	X	X	B	L	0	0	A	0	1
Pitch 1.25mm			N:Other			No. of contacts per row			W:White B:Black			B:Bag Package			RoHS				

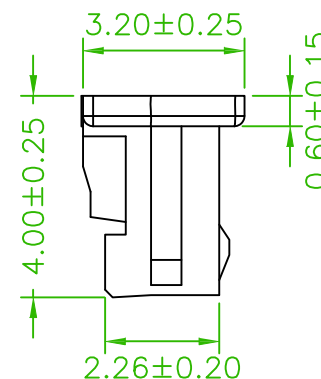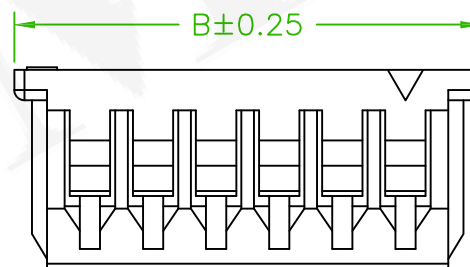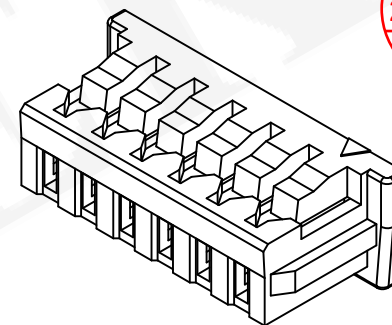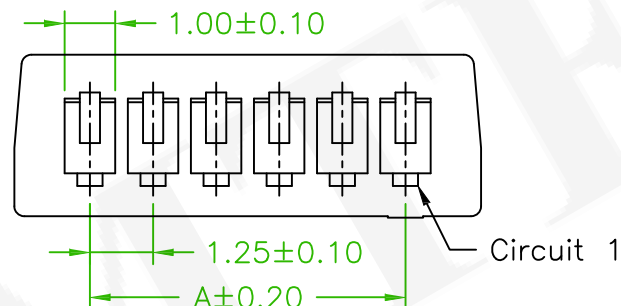

Circuit No.	Dimensions		Circuit No.	Dimensions	
	A	B		A	B
02P	1.25	4.25	12P	13.75	16.75
03P	2.50	5.50	13P	15.00	18.00
04P	3.75	6.75	14P	16.25	19.25
05P	5.00	8.00	15P	17.50	20.50
06P	6.25	9.25	16P	18.75	21.75
07P	7.50	10.50	17P	20.00	23.00
08P	8.75	11.75	18P	21.25	24.25
09P	10.00	13.00	19P	22.50	25.50
10P	11.25	14.25	20P	23.75	26.75
11P	12.50	15.50			

Old Part No.:1250H-XXX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.25mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H1250N0-1XXXBL00A01				繪圖 DRAWN	Jeff 2016/10/27
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Jonny 2016/10/27	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/27	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		