

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 200V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 500MΩ Min
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0

ORDER INFORMATION

5 H 1 2 5 1 N 0 - 1 X X R B L 0 0 A 0 1

Pitch 1.25mm

No. of contacts
per row


R:Red
Insulator

B:Bag

RoHS




No. of contacts	Dimensions	
	A	B
02	1.25	3.95
03	2.50	5.20
04	3.75	6.45
05	5.00	7.70
06	6.25	8.95
07	7.50	10.20
08	8.75	11.45
09	10.00	12.70
10	11.25	13.95
11	12.50	15.20
12	13.75	16.45
13	15.00	17.70
14	16.25	18.95
15	17.50	20.20

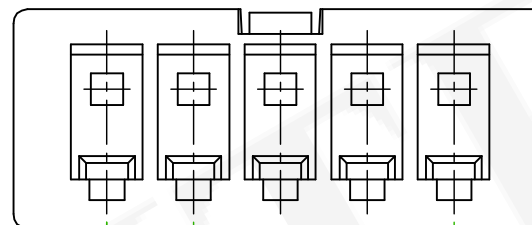


1.25±0.10

A±0.20

B±0.25

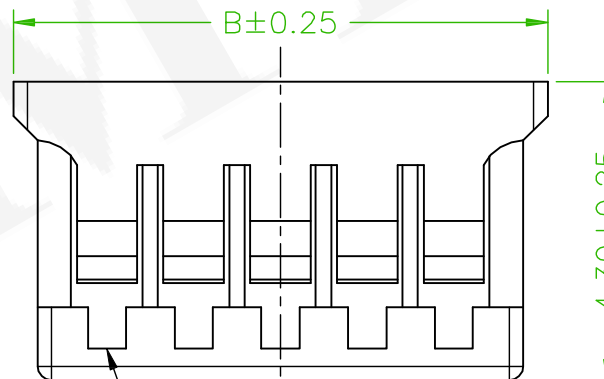

Circuit 1



3.15±0.25

2.40±0.20

Old Part No.:1251H-XXR-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.25mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H1251N0-1XXRBL00A01				繪圖 DRAWN	Jeff 2016/12/15
	圖號 DRAWING NO.	GW090-JF083	版本 REV.	A	核對 CHECKED	Johnny 2016/12/15	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/12/15	
	公差 TOLERANCE	.X ±0.25 .XX ±0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		