


SPECIFICATIONS

Current Rating: 1A AC,DC
 Insulation Resistance: 500MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 500V AC/minute
 Operation Temperature -25°C to +85°C





MATERIAL

Insulator:Nylon 66,UL94V-0

ORDER INFORMATION

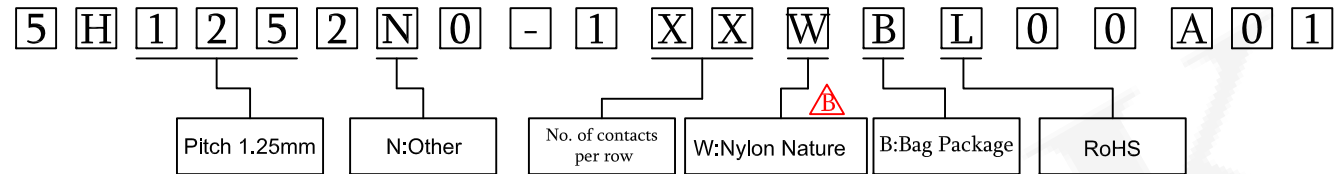

PIN	Dimensions	
	A	B
02	1.25	4.15
03	2.50	5.40
04	3.75	6.65
05	5.00	7.90
06	6.25	9.15
07	7.50	10.40
08	8.75	11.65
09	10.00	12.90
10	11.25	14.15
11	12.50	15.40
12	13.75	16.65
13	15.00	17.90
14	16.25	19.15
15	17.50	20.40

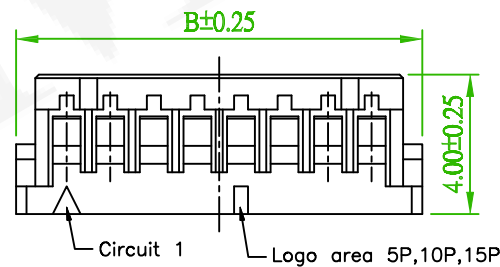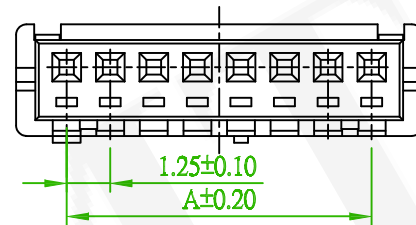

Old Part No.:1252H-1XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x1	ECN No.:170908, Revised the Color	Kilin	2017/09/07

Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.25mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H1252N0-1XXWBL00A01				繪圖 DRAWN	Roy
	圖號 DRAWING NO.	GW090-KL026	版本 REV.	B	核對 CHECKED	Jonny	2016/09/19
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron	2016/09/19
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.X° ± 1°	單位 UNIT	mm	THIRD ANGLE PROJECTION	☉ ↗