

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 150V AC,DC

Temperature Range: -25°C to +85°C





Contact Resistance: 30mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 500V AC/minute

Material:Nylon 66,UL94V-0

ORDER INFORMATION

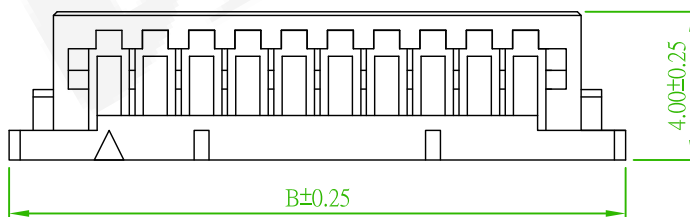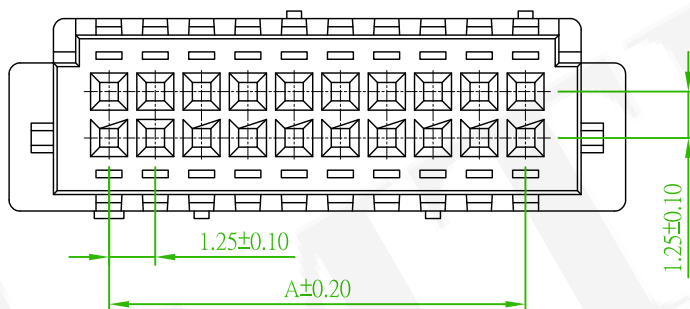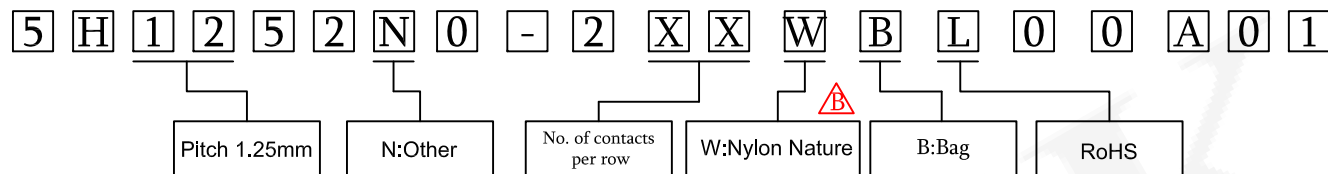

No. of contacts	Dimensions	
	A	B
2x5	5.00	10.40
2x7	7.50	12.90
2x10	11.25	16.65
2x15	17.50	22.90
2x20	23.75	29.15

Old Part No.:1252H-2XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x1	ECN No.:170908, Revised the Color	Killin	2017/09/07

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.25mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H1252N0-2XXWBL00A01				繪圖 DRAWN	Joe 2009/04/17
	圖號 DRAWING NO.	GW090-EL007	版本 REV.	B	核對 CHECKED	Paul 2009/04/17	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2009/04/17	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		