

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 150V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 30mΩ Max Δ

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0






ORDER INFORMATION

5	H	1	2	5	3	N	0	-	1	X	X	W	B	L	0	0	A	0	1
Pitch 1.25mm				N:Other			No. of contacts per row			W:Nylon Nature Δ		B:Bag		RoHS					



Amtek
2017.10.06
文管中心

No. of contacts	Dimensions		
	A	B	C
02	1.25	4.25	2.75
03	2.50	5.50	4.00
04	3.75	6.75	5.25
05	5.00	8.00	6.50
06	6.25	9.25	7.75
07	7.50	10.50	9.00
08	8.75	11.75	10.25
09	10.00	13.00	11.50
10	11.25	14.25	12.75
11	12.50	15.50	14.00
12	13.75	16.75	15.25
13	15.00	18.00	16.50
14	16.25	19.25	17.75
15	17.50	20.50	19.00
20	23.75	26.75	25.25
21	25.00	28.00	26.50
25	30.00	33.00	31.50
30	36.25	39.25	37.75

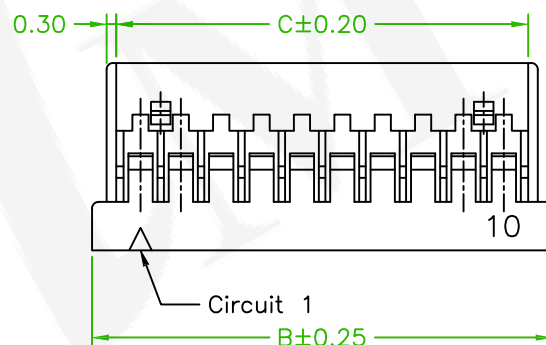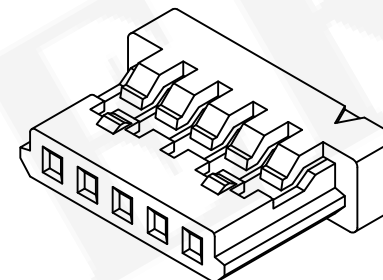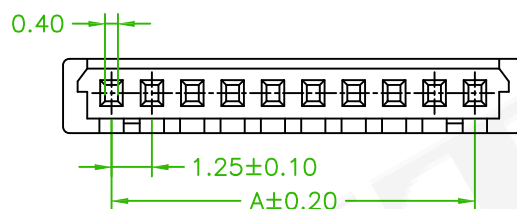

Old Part No.:1253H-XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
Δ x1	ECN No.:170908, Revised the Color	Kilin	2017/09/07
Δ Bx2	Revise the drawing and Voltage Rating: 100V→150V,Contact Resistance: 20mΩ Max→30mΩ Max and TOLERANCE .X±0.35 .XX±0.25→.X±0.25 .XX±0.15	Eloise	2017/01/24

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.25mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H1253N0-1XXWBL00A01				繪圖 DRAWN	Eloise 2017/01/24
	圖號 DRAWING NO.	GW090-EL097	版本 REV.	C	核對 CHECKED	Jonny	2017/01/24
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron	2017/01/24
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15 Δ	單位 UNIT	mm	THIRD ANGLE PROJECTION		