

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 500V AC/minute







Material: Nylon 66,UL94V-0

ORDER INFORMATION

5	H	1	2	5	3	N	1	-	1	X	X	W	B	L	0	0	A	0	1
Pitch 1.25mm				N:Other		No. of contacts per row		W:White		B:Bag		RoHS							



Circuit No.	Dimensions				Circuit No.	Dimensions			
	A	B	C	D		A	B	C	D
02P	1.25	4.40	2.75	1.10	11P	12.50	15.65	14.00	4.70
03P	2.50	5.65	4.00	1.95	12P	13.75	16.90	15.25	4.70
04P	3.75	6.90	5.25	3.20	13P	15.00	18.15	16.50	4.70
05P	5.00	8.15	6.50	3.20	14P	16.25	19.40	17.75	4.70
06P	6.25	9.40	7.75	3.20	15P	17.50	20.65	19.00	4.70
07P	7.50	10.65	9.00	3.20	20P	23.75	26.90	25.25	4.70
08P	8.75	11.90	10.25	3.20	25P	30.00	33.15	31.50	5.70
09P	10.00	13.15	11.50	3.20	30P	36.25	39.40	37.75	5.70
10P	11.25	14.40	12.75	3.20					

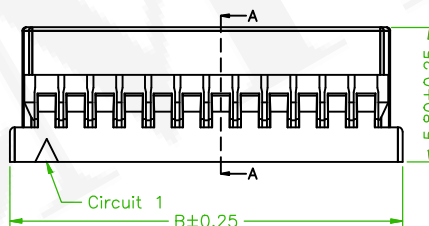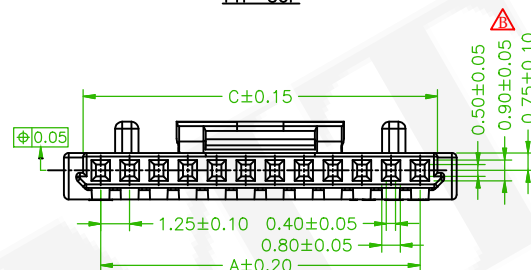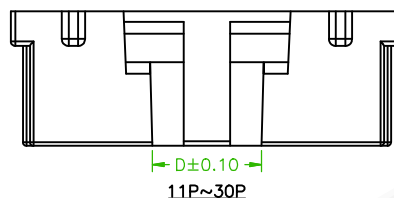

SEC:A-A

Old Part No.:1253HA-XXW-L



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	1.25mm HOUSING				頁數 Page	1/1
品號 PART NO.	5H1253N1-1XXWBL00A01			繪圖 DRAWN	Joe 2009/08/24	
圖號 DRAWING NO.	GW090-EL055		版本 REV.	B	核對 CHECKED	Paul 2009/08/24
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	James 2009/08/24
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15		單位 UNIT	mm	THIRD ANGLE PROJECTION	



QEC NO.230203: Revise the drawing

Rex

2023/02/03

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE