

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 500V AC/minute




Material: Nylon 66,UL94V-0

ORDER INFORMATION

5	H	1	2	5	5	N	0	-	1	X	X	B	B	L	0	0	A	0	1
Pitch 1.25mm				N:Other			No. of contacts per row			B:Black		B:Bag		RoHS					



No. of contacts	Dimensions		
	A	B	C
02	1.25	3.80	6.00
03	2.50	5.05	7.25
04	3.75	6.30	8.50
05	5.00	7.55	9.75
06	6.25	8.80	11.00
08	8.75	11.30	13.50
10	11.25	13.80	16.00
15	17.50	20.05	22.25
20	23.75	26.30	28.50
25	30.00	32.55	34.75
30	36.25	38.80	41.00

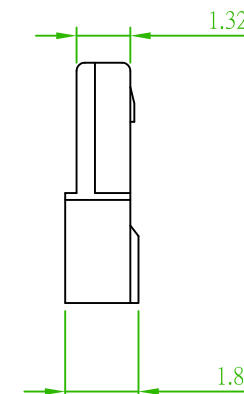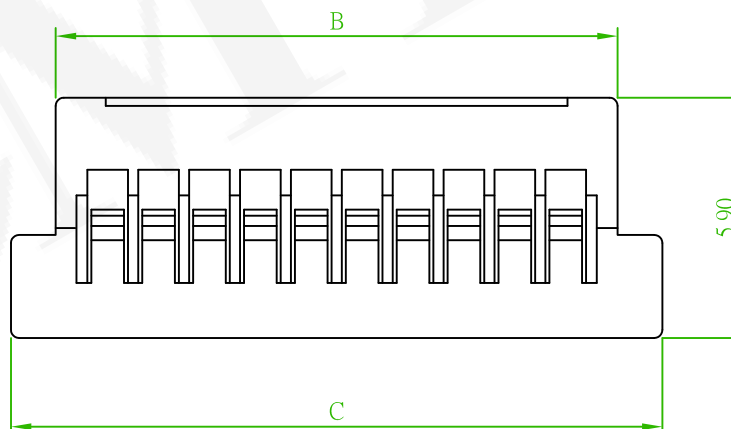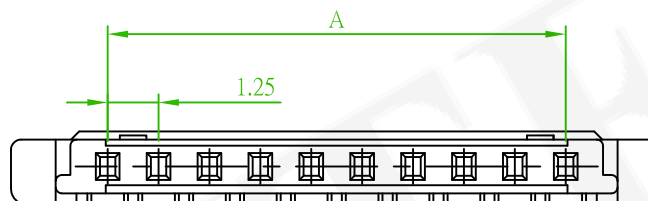

Old Part No.:1255H-XXB-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.25mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H1255N0-1XXBBL00A01				繪圖 DRAWN	Kent 2006/09/14
	圖號 DRAWING NO.	GW090-EL096	版本 REV.	A	核對 CHECKED	Paul 2006/09/14	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2006/09/14	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		