

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 200V AC,DC

Temperature Range: -25°C ~ +85°C


Contact Resistance: 40mΩ Max

Insulation Resistance: 100MΩ Min



Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0



ORDER INFORMATION

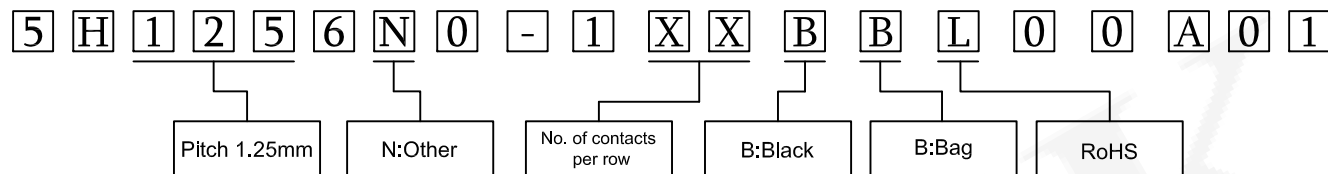

No. of contacts	Dimensions		
	A	B	C
05	2.50	4.90	6.00
07	3.75	6.15	7.25
09	5.00	7.40	8.50
11	6.25	8.65	9.75
13	7.50	9.90	11.00
15	8.75	11.15	12.25
17	10.00	12.40	13.50
19	11.25	13.65	14.75
21	12.50	14.90	16.00
31	18.75	21.15	22.25
41	25.00	27.40	28.50

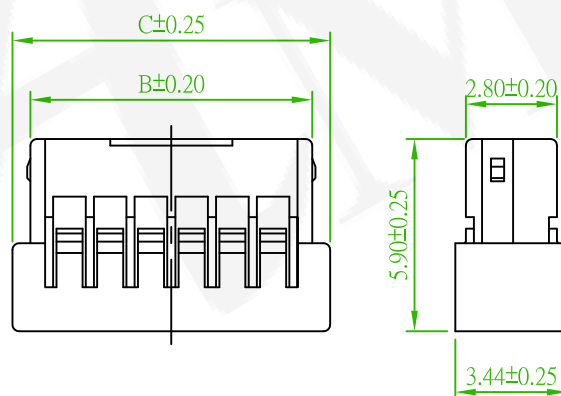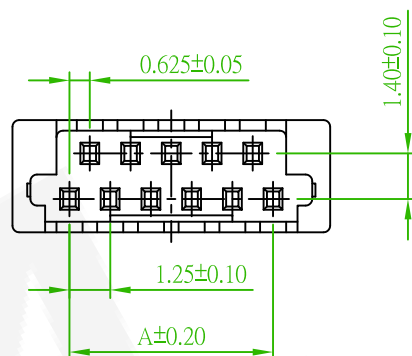

5,7,9,11 Contacts

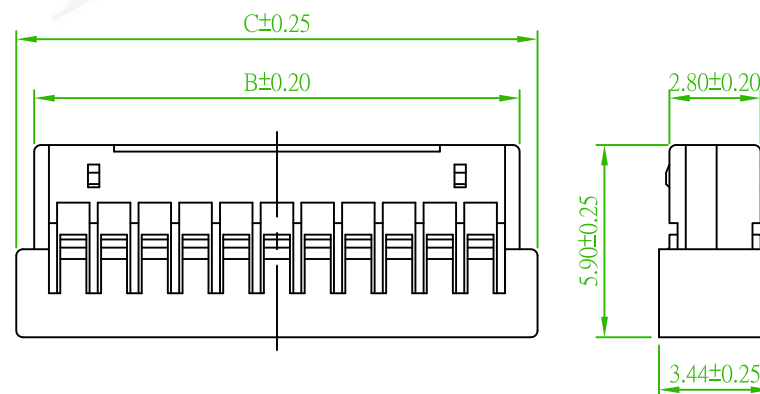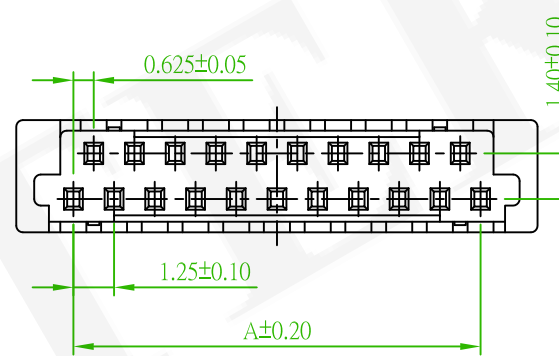

13,15,17,19,21,31,41 Contacts

Old Part No.:1256H-XXB-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.25mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H1256N0-1XXBBL00A01				繪圖 DRAWN	Kent 2004/10/25
	圖號 DRAWING NO.	GW090-EL057	版本 REV.	A	核對 CHECKED	Paul 2004/10/25	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2004/10/25	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		