

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 500V AC/minute



Material: Nylon 66,UL94V-0

ORDER INFORMATION

5	H	1	2	5	7	N	0	-	1	X	X	W	B	L	0	0	A	0	1
Pitch 1.25mm				N:Other			No. of contacts per row			W:White		B:Bag		RoHS					



No. of contacts	Dimensions	
	A	B
02	1.25	3.05
03	2.50	4.30
04	3.75	5.55
05	5.00	6.80
06	6.25	8.05
07	7.50	9.30
08	8.75	10.55
09	10.00	11.80
10	11.25	13.05
11	12.50	14.30
12	13.75	15.55
13	15.00	16.80
14	16.25	18.05
15	17.50	19.30

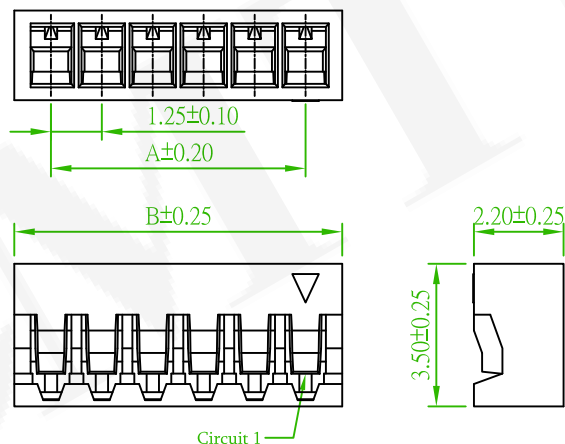

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No.:1257H-XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.25mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H1257N0-1XXWBL00A01				繪圖 DRAWN	Kent 2006/10/02
	圖號 DRAWING NO.	GW090-EL058	版本 REV.	A	核對 CHECKED	Paul 2006/10/02	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2006/10/02	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		