

SPECIFICATIONS

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Insulation Resistance: 1000MΩ Min

ORDER INFORMATION

5 H 1 2 7 2 N 1 - 1 X X B B L 0 0 P 0 1

Pitch 1.27mm





N:Other

No. of contacts
per row

B:Black

B:Bag

RoHS

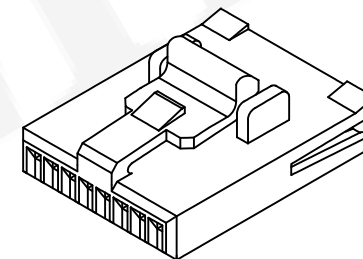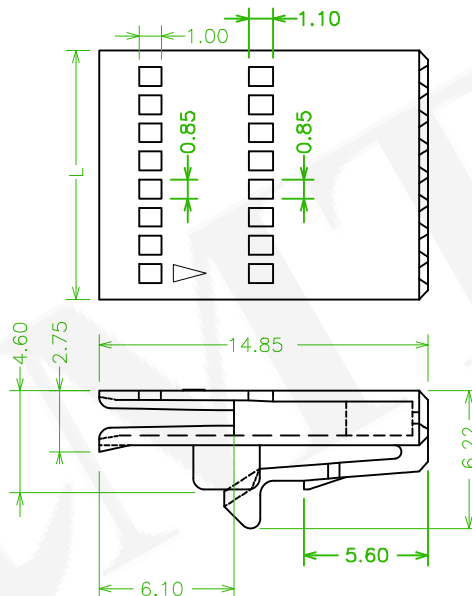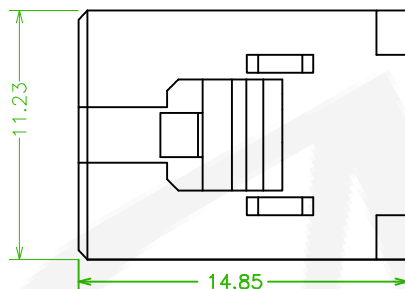

	L		L		L
2 p	3.61	11 p	15.04	20 p	26.47
3 p	4.88	12 p	16.31	21 p	27.74
4 p	6.15	13 p	17.58	22 p	29.01
5 p	7.42	14 p	18.85	23 p	30.28
6 p	8.69	15 p	20.12	24 p	31.55
7 p	9.96	16 p	21.39	25 p	32.82
8 p	11.23	17 p	22.66	26 p	34.09
9 p	12.50	18 p	23.93	27 p	35.36
10p	13.77	19 p	25.20	28 p	36.63
				29 p	37.90
				30 p	39.17

Amtek
2017.08.29
文管中心

Old Part No.:1272H-XXBB-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	1.27mm HOUSING				頁數 Page	1/1
品號 PART NO.	5H1272N1-1XXBBL00P01				繪圖 DRAWN	Sinnys 2011/11/04
圖號 DRAWING NO.	GW090-EL063	版本 REV.	A	核對 CHECKED	Paul 2011/11/04	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2011/11/04	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		