







SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 500MΩ Min
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0

ORDER INFORMATION

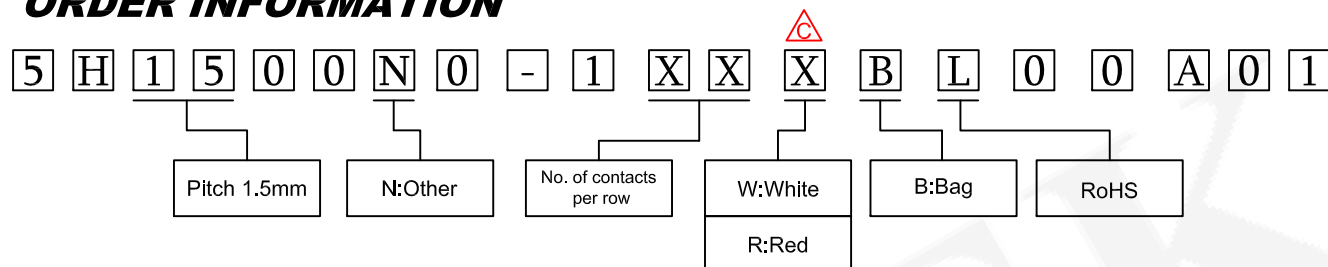

No. of contacts	Dimensions	
	A	B
02	1.50	4.50
03	3.00	6.00
04	4.50	7.50
05	6.00	9.00
06	7.50	10.50
07	9.00	12.00
08	10.50	13.50
09	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00

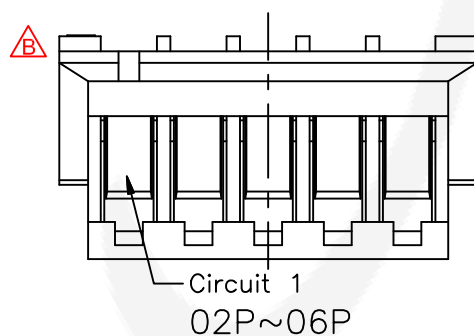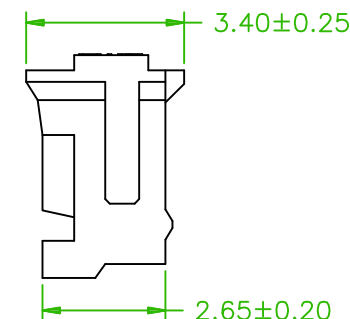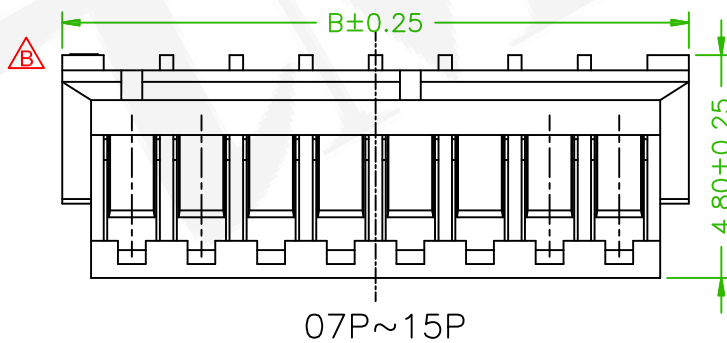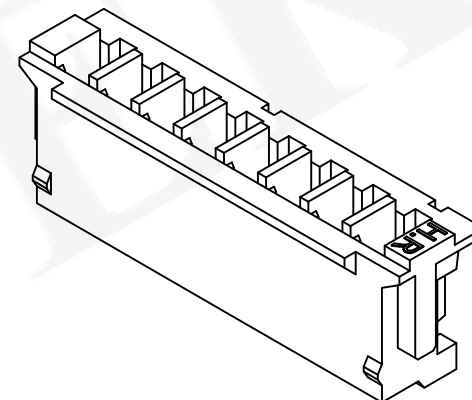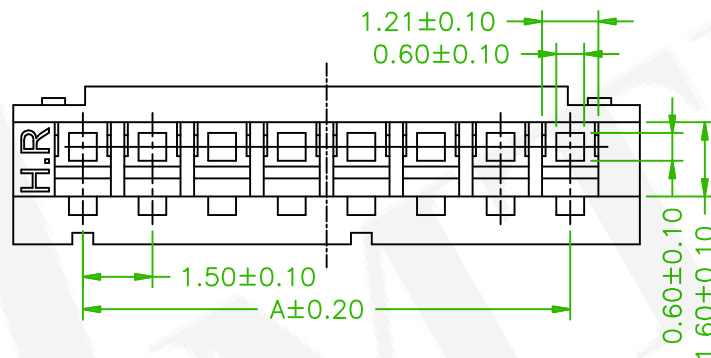

Old Part No.:1500H-XXW-L

△x2	Add:R:Red	David	2020/02/13
△x2	ECN NO. 190410,Revise the drawing	Nick	2019/05/02
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.5mm HOUSING				頁數 Page	1/1
	品號 PART NO.	△ 5H1500N0-1XXXBL00A01				繪圖 DRAWN	Kaiser 2013/04/15
	圖號 DRAWING NO.	GW090-EL065	版本 REV.	C	核對 CHECKED	Paul 2013/04/15	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2013/04/15	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		