





SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 350V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 20m Ω Max
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 1000V AC/minute
 Material: Nylon 66,UL94V-0


ORDER INFORMATION

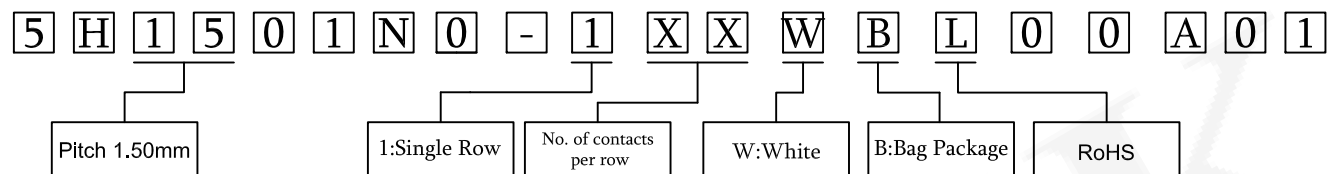

No.of contacts	Dimensions	
	Dim.A	Dim.B
102	1.50	4.10
103	3.00	5.60
104	4.50	7.10
105	6.00	8.60
106	7.50	10.10
107	9.00	11.60
108	10.50	13.10
109	12.00	14.60
110	13.50	16.10
111	15.00	17.60
112	16.50	19.10
113	18.00	20.60
114	19.50	22.10
115	21.00	23.60

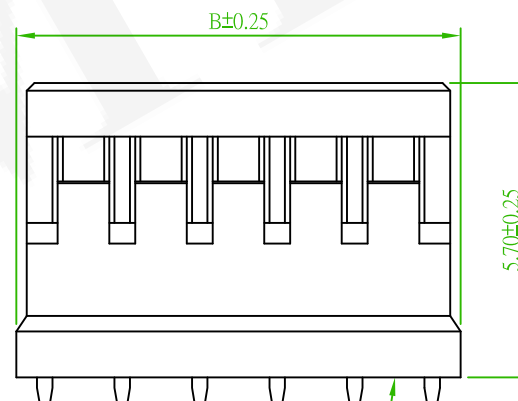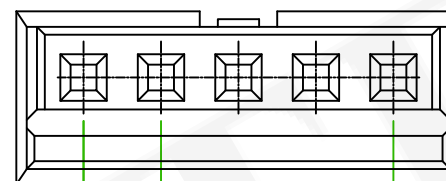

Circuit 1

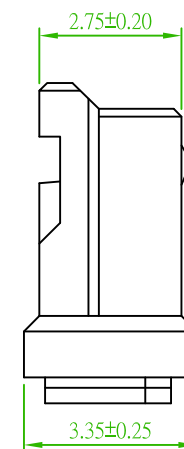

Old Part No.:1501H-XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.5mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H1501N0-1XXWBL00A01				繪圖 DRAWN	Jeff 2016/10/21
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Johnny 2016/10/21	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/21	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		