

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 200V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0

ORDER INFORMATION

5 H 1 5 0 2 N 0 - 1 X X W B L 0 0 A 0 1

Pitch 1.50mm

N:Other

No. of contacts
per row


W:White

B:Bag


RoHS



No. of contacts	Dimensions	
	A	B
02	1.50	3.70
03	3.00	5.20
04	4.50	6.70
05	6.00	8.20
06	7.50	9.70
07	9.00	11.20
08	10.50	12.70
09	12.00	14.20
10	13.50	15.70
11	15.00	17.20
12	16.50	18.70
13	18.00	20.20
14	19.50	21.70
15	21.00	23.20

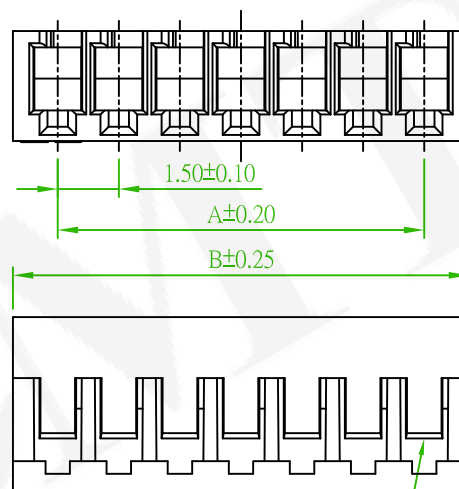

Circuit 1



P.C.B LAYOUT

Old Part No.:1500RH-XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.5mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H502N0-1XXWBL00A01				繪圖 DRAWN	Volvo 2007/10/02
	圖號 DRAWING NO.	GW090-EL066	版本 REV.	A	核對 CHECKED	Paul 2007/10/02	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2007/10/02	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		