

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 800V AC/minute

Material: Nylon 66,UL94V-2 Black

ORDER INFORMATION

5	H	2	0	0	0	N	0	-	1	X	X	B	B	L	0	0	D	0	2
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Pitch 2.00mm

N:Other




No. of contacts
per row

B:Black

B:Bag

RoHS

No. of contacts	Dimensions	
	A	B
02	2.00	4.30
03	4.00	6.30
04	6.00	8.30
05	8.00	10.30
06	10.00	12.30
07	12.00	14.30
08	14.00	16.30
09	16.00	18.30
10	18.00	20.30
11	20.00	22.30
12	22.00	24.30
13	24.00	26.30
14	26.00	28.30
15	28.00	30.30
16	30.00	32.30
17	32.00	34.30
18	34.00	36.30
20	38.00	40.30

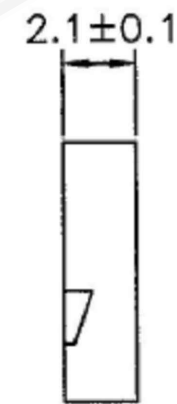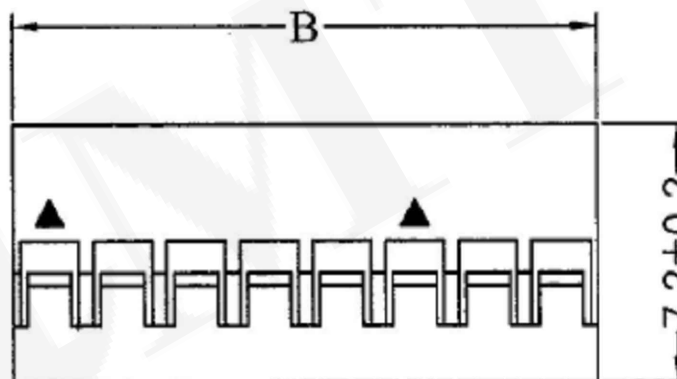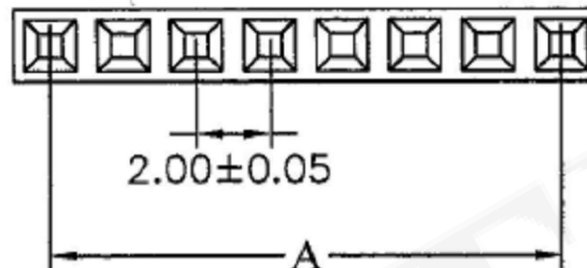

"A" & "B" DIM. TOLERANCE
(02P~10P) ± 0.15
(11P~20P) ± 0.25



REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	2.0mm HOUSING				頁數 Page	1/1
品號 PART NO.	5H2000N0-1XXBBL00D02			繪圖 DRAWN	Alice 2021/10/14	
圖號 DRAWING NO.	GW097-AZ579			版本 REV.	A	核對 CHECKED Josh 2021/10/14
客戶品號 CUSTOMER P/N				比例 SCALE	None	承認 APPROVED Josh 2021/10/14
公差 TOLERANCE	.X ± 0.30	單位 UNIT	mm	THIRD ANGLE PROJECTION		