

SPECIFICATIONS

Current Rating: 2A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 800V AC/minute

Material: Nylon 66,UL94V-0

ORDER INFORMATION

5 H 2 0 0 2 N 0 - 1 X X W B L 0 0 A 0 1

Pitch 2.00mm

N:Other

No. of contacts
per row

W:White

B:Bag

RoHS






AMTEK 糧德

2021.05.11

Released DCC

No. of contacts	Dimensions	
	A	B
02	2.00	4.90
03	4.00	6.90
04	6.00	8.90
05	8.00	10.90
06	10.00	12.90
07	12.00	14.90
08	14.00	16.90
09	16.00	18.90
10	18.00	20.90
11	20.00	22.90
12	22.00	24.90
13	24.00	26.90
14	26.00	28.90
15	28.00	30.90

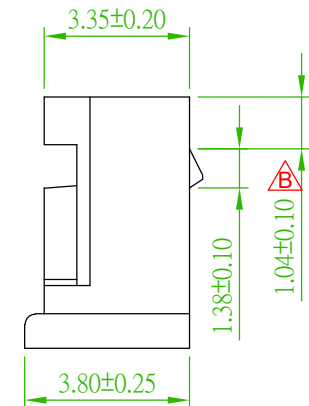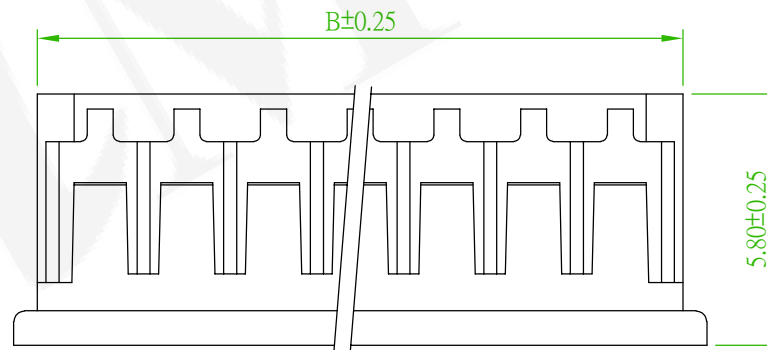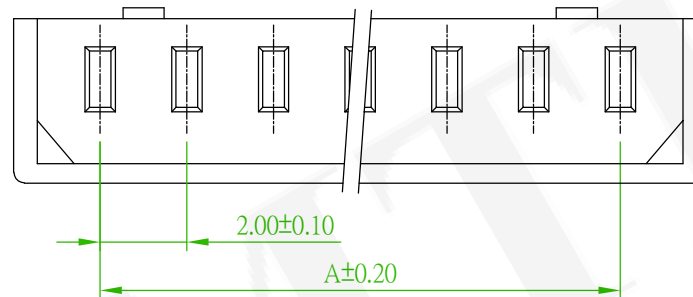

Old Part No.:2002H-XXW-L

REV.	ECN NO.:210411 Revise the Drawing	Benson	2021/05/05
	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	2.0mm HOUSING				頁數 Page	1/1
品號 PART NO.	5H2002N0-1XXWBL00A01			繪圖 DRAWN	Jeff 2016/12/13	
圖號 DRAWING NO.	GW090-JF079	版本 REV.	B	核對 CHECKED	Johnny 2016/12/13	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/12/13	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		