

SPECIFICATIONS

Current Rating: 4A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0

ORDER INFORMATION

5 H 2 0 0 6 N 0 - 1 X X W B L 0 0 A 0 1

Pitch 2.00mm

N:Other

No. of contacts
per row







W:White

B:Bag

RoHS



No. of contacts	Dimensions		
	A	B	C
02	2.00	6.00	4.80
03	4.00	8.00	6.80
04	6.00	10.00	8.80
05	8.00	12.00	10.80
06	10.00	14.00	12.80
07	12.00	16.00	14.80
08	14.00	18.00	16.80
09	16.00	20.00	18.80
10	18.00	22.00	20.80
11	20.00	24.00	22.80
12	22.00	26.00	24.80
13	24.00	28.00	26.80
14	26.00	30.00	28.80
15	28.00	32.00	30.80

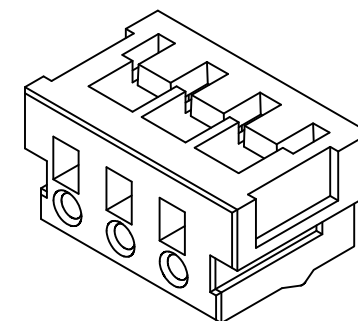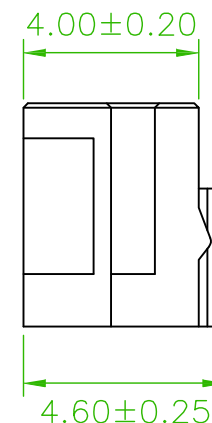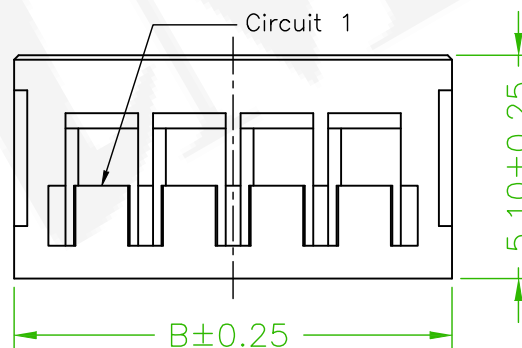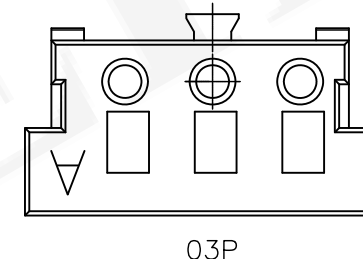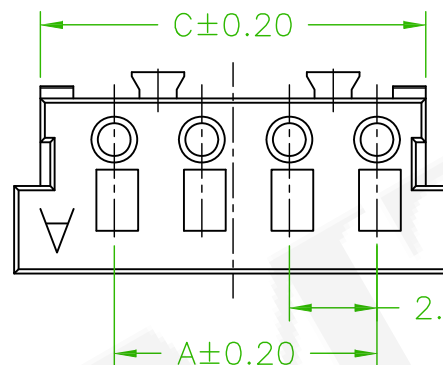

Old Part No.:2006H-XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	2.0mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H2006N0-1XXWBL00A01			繪圖 DRAWN	Roy 2015/11/27
圖號 DRAWING NO.	GW090-EL030	版本 REV.	A	核對 CHECKED	Paul 2015/11/27	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2015/11/27	
公差 TOLERANCE	.X ±0.25 .XX ±0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		