

SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 30mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66,UL94V-0

ORDER INFORMATION

5 H 2 0 0 8 N 0 - 1 X X W B L 0 0 A 0 1

Pitch 2.00mm

1:Single Row

No. of contacts
per row

W:White


B:Bag Package

RoHS





Amtek
2017.08.29
文管中心


No.of contacts	Dimensions	
	Dim.A	Dim.B
102	2.00	4.60
103	4.00	6.60
104	6.00	8.60
105	8.00	10.60
106	10.00	12.60
107	12.00	14.60
108	14.00	16.60
109	16.00	18.60
110	18.00	20.60
111	20.00	22.60
112	22.00	24.60
113	24.00	26.60
114	26.00	28.60
115	28.00	30.60
116	30.00	32.60



02P

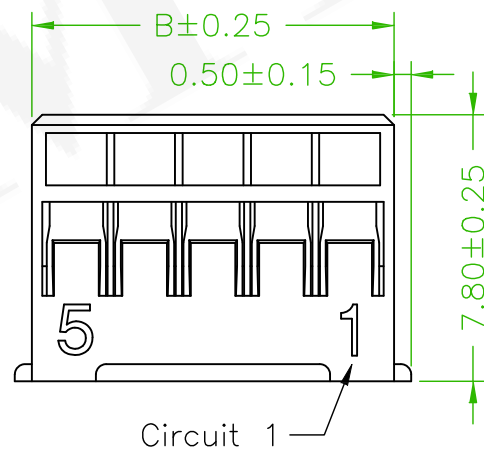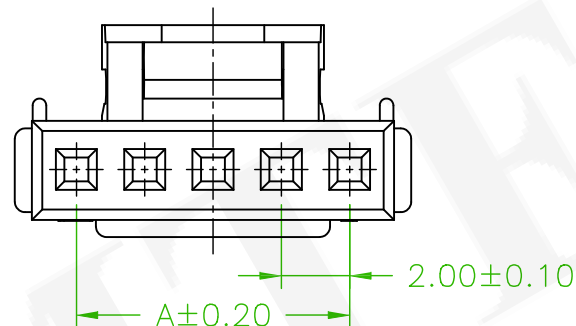

Circuit 1

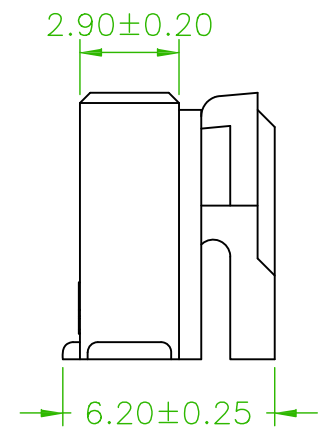

Old Part No.:2008H-XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.0mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H2008N0-1XXWB L00A01				繪圖 DRAWN	Jeff 2016/10/21
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Johnny 2016/10/21	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/21	
	公差 TOLERANCE	.X ±0.25 .XX ±0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		