

SPECIFICATIONS

Current Rating: 2A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -25°C ~ +85°C


Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min


Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0

ORDER INFORMATION

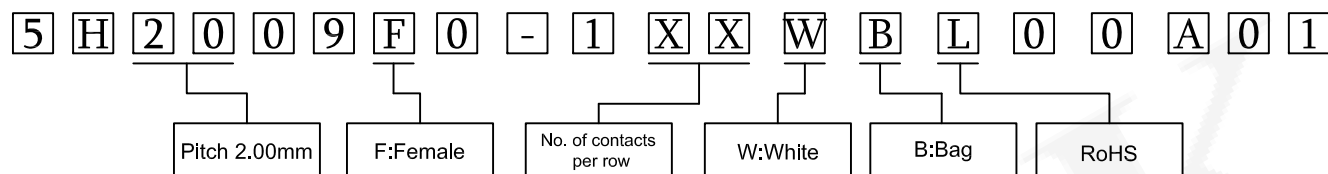

No. of contacts	Dimensions		
	A	B	C
02	2.00	6.60	4.60
03	4.00	8.60	6.60
04	6.00	10.60	8.60
05	8.00	12.60	10.60
06	10.00	14.60	12.60
07	12.00	16.60	14.60
08	14.00	18.60	16.60
09	16.00	20.60	18.60
10	18.00	22.60	20.60
11	20.00	24.60	22.60
12	22.00	26.60	24.60
13	24.00	28.60	26.60

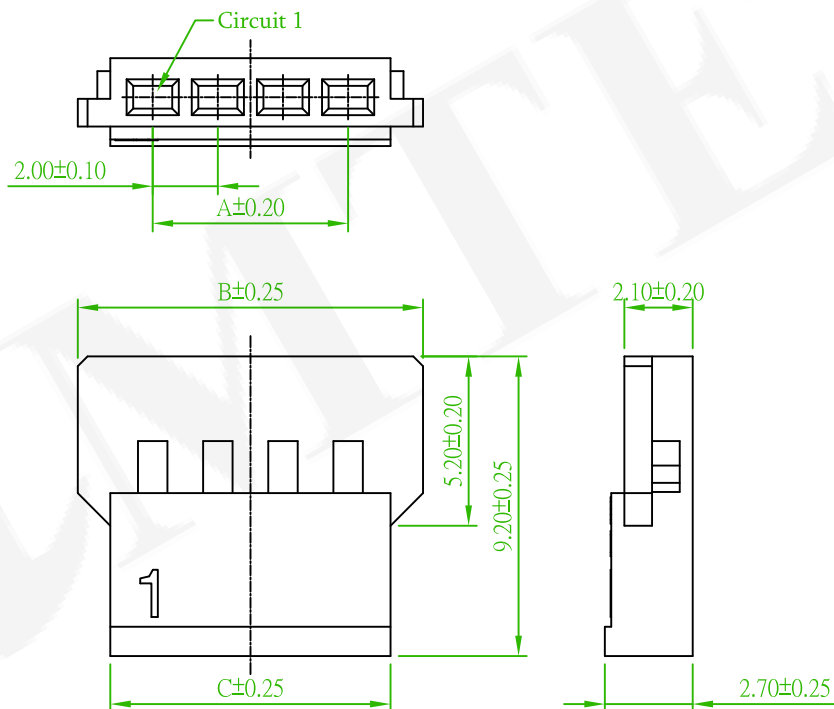

Old Part No.:2009H-FXXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.0mm FEMALE HOUSING				頁數 Page	1/1
	品號 PART NO.	5H2009F0-1XXWBL00A01				繪圖 DRAWN	Kent 2007/12/04
	圖號 DRAWING NO.	GW090-EL037	版本 REV.	A	核對 CHECKED	Paul 2007/12/04	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2007/12/04	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		